



## **COMPRESSORS, AIR TOOLS & FITTINGS**

<b>272-275</b>	Compressors	<b>287</b>	Air Nailers & Staplers
<b>276-277</b>	Impact Wrenches	<b>288</b>	Air Tool Kits
<b>278</b>	Air Ratchets	<b>289</b>	Air Blowers
<b>279</b>	Air Drills	<b>290-291</b>	Air Spray Guns
<b>280-282</b>	Air Sanders	<b>292</b>	Air Caulking Guns
<b>283</b>	Air Cut Off & Grinders	<b>293-296</b>	Air Hoses
<b>284-285</b>	Air Die Grinders	<b>297-303</b>	Air Line Fittings
<b>286</b>	Air Shears, Saw & Riveters		

## COMPRESSORS

Pages 272-275



## IMPACT WRENCHES

Pages 276-277



## AIR RATCHETS

Page 278



## AIR DRILLS

Page 279



## AIR SANDERS

Pages 280-282



## AIR CUT OFF & GRINDERS

Page 283



## AIR DIE GRINDERS

Pages 284-285



## AIR SHEARS, SAW & RIVETERS

Page 286



## AIR NAILERS & STAPLERS

Page 287



## AIR TOOL KITS

Page 288



## AIR BLOWERS

Page 289



## AIR SPRAY GUNS

Pages 290-291



## AIR CAULKING GUNS

Page 292



## AIR HOSES & LINE FITTINGS

Pages 293-303





### 1 Belt-Driven Air Compressor, 200L, 2.2kW

- Belt-driven
- Suitable for workshop use
- Thermal motor protection overload, on/off pressure switch, pressure gauge and twin outlet
- Wheels and transport handle
- Quick euro coupling outlet

Tank Size:	200L
Motor:	2.2kw (3.0HP)
Air displacement:	13.03 cfm (369L/Min)
Free air delivered (FAD):	8.44 cfm (239L/Min)
Input current:	13A
Speed:	1100rpm
Maximum pressure:	145psi (10bar)
Dimensions:	1580 x 480 x 950mm
Weight:	113kg
Stock No.	Part No.
55315	DA200/369M

### 2 Stationary Belt-Driven Air Compressor, 200L, 2.2kW

- Belt-driven
- Suitable for workshop use
- Thermal motor protection overload, on/off pressure switch, pressure gauge and twin outlet
- Quick euro coupling outlet

Tank Size:	200L
Motor:	2.2kw (3.0HP)
Air displacement:	13.03 cfm (369L/Min)
Free air delivered (FAD):	8.44 cfm (239L/Min)
Input current:	13A
Speed:	1100rpm
Maximum pressure:	10bar/145psi
Dimensions:	1580 x 480 x 950mm
Weight:	109kg
Stock No.	Part No.
55313	DA200/369S



### 3 Belt-Driven Air Compressor, 150L, 2.2kW

- Belt-driven
- Suitable for workshop use
- Thermal motor protection overload, on/off pressure switch, pressure regulator and pressure gauge
- Rubber wheels and transport handle
- Quick euro coupling outlet

Tank Size:	150L
Motor:	2.2kw (3.0HP)
Air displacement:	13.03 cfm (369 L/Min)
Free air delivered (FAD):	8.44 cfm (239 L/Min)
Input current:	13A
Speed:	1100rpm
Maximum pressure:	10bar/145psi
Dimensions:	1280 x 480 x 950mm
Weight:	102kg
Stock No.	Part No.
55305	DA150/369M

### 4 Stationary Belt-Driven Air Compressor, 150L, 2.2kW

- Belt-driven
- Suitable for workshop use
- Thermal motor protection overload, on/off pressure switch, pressure regulator and pressure gauge
- Quick euro coupling outlet

Tank Size:	150L
Motor:	2.2kw (3.0HP)
Air displacement:	13.03 cfm (369 L/Min)
Free air delivered (FAD):	8.44 cfm (239 L/Min)
Input current:	13A
Speed:	1100rpm
Maximum pressure:	145psi (10bar)
Dimensions:	1280 x 480 x 950mm
Weight:	98kg
Stock No.	Part No.
55304	DA150/369S



## 1 Compressor & Air Tool Kit, 150L

- PVC Air Line hose is high visibility to draw attention to the trip hazard
- Air tool kit includes a 1/2" impact wrench, 3/8" air ratchet, air chisel, die grinder and two blow guns along with a host of specialist accessories
- Air tool kit comes in a convenient heavy-duty storage case.

Stock No.	Part No.
70530	PTKATL150L



## 2 Belt-Driven Air Compressor, 100L, 2.2kW

- Belt-driven
- Suitable for workshop use
- Thermal motor protection overload, on/off pressure switch, pressure regulator and pressure gauge
- Two quick euro coupling outlet
- Wheels and transport handle

Tank Size:	100L
Motor:	2.2kw (3.0HP)
Air displacement:	11.7fm (330L/min)
Free air delivered (FAD):	8.1cfm (230L/min)
Input current:	13A
Speed:	1100rpm
Maximum pressure:	116psi (8bar)
Dimensions:	1090 x 430 x 860mm
Weight:	75kg

Stock No.	Part No.
31254	DA100/330



## 3 Direct Drive V-Twin Air Compressor, 100L, 2.2kW

- Suitable for workshop and site use
- V-twin-cylinder cast iron pump
- Thermal motor protection overload, on/off pressure switch, pressure regulator and pressure gauge
- Two quick euro coupling outlet
- Wheels and transport handle

Tank Size:	100L
Motor:	2.2kw (3.0HP)
Air displacement:	14.6cfm (412L/min)
Free air delivered (FAD):	8.0cfm (227L/min)
Input current:	13A
Speed:	2850rpm
Maximum pressure:	116psi (8bar)
Dimensions:	1075 x 392 x 801mm
Weight:	43kg

Stock No.	Part No.
65396	DA100/412TV



## 4 Compressor Oil, 1L

Blended amber coloured oil using a high VI premium grade base oil and selective additives to provide long term protection and reliability for compressors. Suitable for single and multi-stage compressors up to temperatures of 200°C. Display packed.

Stock No.	Part No.	Volume
34683	CO1000	1L





### 1 Direct Drive V-Twin Oiled Air Compressor, 50L, 2.2kW

- Suitable for workshop and site use
- V-twin-cylinder cast iron pump
- Thermal motor protection overload, on/off pressure switch, pressure regulator and pressure gauge
- Two quick euro coupling outlet
- Wheels and transport handle

Tank Size:	50L
Motor:	2.2kw (3.0HP)
Air displacement:	14.6cfm (412L/min)
Free air delivered (FAD):	8.0cfm (227L/min)
Input current:	13A
Speed:	2850rpm
Maximum pressure:	116psi (8bar)
Dimensions:	790 x 390 x 730mm
Weight:	43kg

Stock No.	Part No.
29355	DA50/412TV

### 2 Direct Drive Oiled Air Compressor, 50L, 1.5kW

- Suitable for workshop and site use
- Thermal motor protection overload, on/off pressure switch, pressure regulator and pressure gauge
- Wheels and transport handle

Tank Size:	50L
Motor:	1.5kw (2.0HP)
Air displacement:	7.3cfm (206L/min)
Free air delivered (FAD):	4.0cfm (113L/min)
Input current:	13A
Speed:	2850rpm
Maximum pressure:	116psi (8bar)
Sound pressure level:	74.4dB
Sound power level:	97dB
Dimensions:	765 x 325 x 705mm
Weight:	33kg

Stock No.	Part No.
24981	DA50/207

### 3 230V Oil Free Compressor and Air Tool Kit

- Euro coupling
- 5-piece air tool kit included
- Lightweight
- Low maintenance
- Wheels or easy manoeuvrability

Tank Size:	24L
Motor:	1.1kw (1.5HP)
Air displacement:	6.71cfm (190L/min)
Free air delivered (FAD):	3.53cfm (100L/min)
Speed:	2850rpm
Piston diameter:	50mm
Piston stroke:	23mm
Max pressure:	116psi (8bar)
Sound pressure level:	92dB(A)
Sound power level:	96dB(A)
Weight:	21kg
Dimensions:	(L)570 x (D)250 x (H)570mm

Stock No.	Part No.
90126	DA25/19/K



## 1 Air Compressor, 24L, 1.5kW

- Power and portability
- Good volume output for general use
- Thermal motor protection overload, on/off pressure switch, pressure regulator and pressure gauge
- Quick euro coupling outlet
- Wheels and transport handle

Tank Size:	24L
Motor:	1.5kw (2.0HP)
Air displacement:	7.3cfm (206L/min)
Free air delivered (FAD):	4.0cfm (113L/min)
Input current:	13A
Speed:	2850rpm
Maximum pressure:	116psi (8bar)
Dimensions:	580 x 250 x 560mm
Weight:	24kg
Stock No.	Part No.
24980	DA25/207



## 2 Direct Drive Oil Free Air Compressor, 24L, 1.1kW

### Air Receiver CE Approved

- Power and portability
- Motor emits no fumes
- Long maintenance free life
- Pressure switch, pressure regulator and pressure gauge
- Quick euro coupling outlet
- Can be transported on its side
- Wheels and transport handle

Tank Size:	24L
Motor:	1.1kw (1.5HP)
Air displacement:	6.0cfm (169L/min)
Free air delivered (FAD):	3.46cfm (98L/min)
Input current:	13A
Speed:	2850rpm
Maximum pressure:	116psi (8bar)
Dimensions:	600 x 250 x 600mm
Weight:	23kg
Stock No.	Part No.
24978	DA25/169



## 3 Air Compressor, 8L, 0.75kW

- Long maintenance free life
- On/off pressure switch, pressure regulator and pressure gauge
- Quick euro coupling outlet

Tank Size:	8L
Motor:	0.75kw (1.1HP)
Air displacement:	4.2cfm (118L/min)
Free air delivered (FAD):	2.43cfm (69L/min)
Input current:	13A
Speed:	2850rpm
Maximum pressure:	116psi (8bar)
Dimensions:	510 x 250 x 50mm
Weight:	17kg
Stock No.	Part No.
24975	DA8/118



## 4 Oil-Free Air Compressor, 6L, 1.1kW

### Air Receiver CE Approved

- Power and portability
- Motor emits no fumes
- Can be transported on its side
- Long maintenance free life
- Pressure switch, pressure regulator and pressure gauge
- Quick euro coupling outlet

Tank Size:	6L
Motor:	1.1kw (1.5HP)
Air displacement:	6.0cfm (169L/min)
Free air delivered (FAD):	3.46cfm (98L/min)
Input current:	13A
Speed:	2850rpm
Maximum pressure:	116psi (8bar)
Dimensions:	485 x 275 x 550mm
Weight:	14kg
Stock No.	Part No.
24974	DA6/169

## 5 Oil-Free Air Compressor, 6L, 1.2kW

- Power and portability
- Motor emits no fumes
- Long maintenance free life
- Pressure switch, pressure regulator and pressure gauge
- Fitted with a pressure switch and air outlet gauge
- Quick euro coupling outlet
- Supplied complete with a 1.7m approved cable

Tank Size:	6L
Motor:	1.2kw (1.5HP)
Air displacement:	6.5cfm (185L/min)
Free air delivered (FAD):	5.1cfm (145L/min)
Input current:	13A
Speed:	4000rpm
Maximum pressure:	116psi (8bar)
Dimensions:	320 x 278 x 330mm
Weight:	7.7kg
Stock No.	Part No.
02115	DA6/180







## 1 Air Impact Wrench, 1" Sq. Dr.

- Pinless hammer
- 3-position power regulator in forward and reverse
- Made with heavy duty materials
- Removable side handle provides excellent control
- Side exhaust
- Ideal for high volume repair work on trucks and other heavy machinery

Ultimate torque:	2,200Nm (1,620ft/lb)
Free speed:	3,900 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	40cfm (1,132L/min)
Vibration level:	7.029m/s <sup>2</sup>
Min. hose size:	1/2" (13mm)
Air inlet:	1/2" BSP
Weight:	12.70kg

Stock No.	Part No.
84128	DAT-AIW1



## 3 Air Impact Wrench, 3/4" Sq. Dr.

- Rocking dog air impact wrench
- Adjustable 3-position power in forward position
- Full power in reverse
- Ergonomic design with rubber protective grip
- Handle exhaust

Ultimate torque:	1000Nm (740ft/lb)
Free speed:	7,000 rpm
Operating air pressure:	6.2bar/90psi
Average air consumption:	6.5cfm (184L/min)
Vibration level:	4.35m/s <sup>2</sup>
Min. hose size:	3/8" I/D
Air inlet:	1/4" BSP
Weight:	3.0kg

Stock No.	Part No.
83964	DAT-AIW34



## 2 Composite Body Air Impact Wrench, 3/4" Sq. Dr.

- Expert Quality
- Low noise, low vibration
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Rotating air inlet

Ultimate torque:	1627Nm (1200ft/lb)
Free speed:	5,500 rpm
Operating air pressure:	6.2bar/90psi
Average air consumption:	6cfm (170L/min)
Vibration level:	10.2m/s <sup>2</sup>
Min. hose size:	1/2" (10mm)
Air inlet:	3/8" BSP
Weight:	3.4kg

Stock No.	Part No.
48413	5204PRO



**STORM FORCE**



**1**

### Composite Body Air Impact Wrench, 1/2" Sq. Dr.

- Expert Quality
- Low noise, low vibration
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Rotating air inlet

Ultimate torque:	813Nm (600ft/lb)
Free speed:	7,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.4cfm (125L/min)
Vibration level:	2.8m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	2.2kg
Stock No.	Part No.
41096	5201PRO

**2**

### Air Impact Wrench Kit, 1/2" Sq. Dr.

- Heavy duty hammer mechanism
- Adjustable 3-position power in forward position
- Full power in reverse
- Ergonomic design with rubber protective grip
- Handle exhaust

Ultimate torque:	680Nm (500ft/lb)
Free speed:	7,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption :	6.5cmf (184L/min)
Vibration level:	4.35m/s <sup>2</sup>
Min. hose size:	3/8" I/D
Air inlet:	1/4" BSP
Weight:	2.59kg
Stock No.	Part No.
83745	DAT-AIW12

**3**

### Draper Storm Force® Air Impact Wrench with Composite Body, 1/2" Sq. Dr.

- Low noise, low vibration
- The composite body
- Reduces operator fatigue and the 'cold sink' effect

Ultimate torque:	340Nm (250ft/lb)
Free speed:	7,500 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.0cfm (114L/min)
Vibration level:	3.3m/s <sup>2</sup>
Min. hose size:	3/8" I/D
Air inlet:	1/4" BSP
Weight:	1.8kg
Stock No.	Part No.
65017	SFAI12



**4**

### Compact Composite Body Air Impact Wrench, 3/8" Sq. Dr.

- Expert Quality
- Low noise, low vibration
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Rotating air inlet
- Compact and lightweight

Ultimate torque:	270Nm (200ft/lb)
Free speed:	9,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	3.9m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.2kg
Stock No.	Part No.
43326	5202PRO

**5**

### Butterfly Type Air Impact Wrench, 3/8" Sq. Dr.

- Single hammer butterfly air impact wrench
- Lightweight aluminium housing
- Three speed reversible motor
- Built-in regulator varies speed and power
- Swivel air inlet provides easy manoeuvring
- Butterfly throttle for easy single hand operating
- Compact size helps in tight spaces
- Side exhaust
- Ideal for transmission, body panel, exhaust system and small engine repair

Ultimate torque:	102Nm (75ft/lb)
Free speed:	10,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	6cfm (170L/min)
Vibration level:	2.5m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.90kg
Stock No.	Part No.
84120	DAT-BAIW







### 1 Air Ratchet, 1/2" Sq. Dr.

- Twin ratchet paws
- Stubby yoke
- Teaser trigger
- 360 degree turnable exhaust deflector
- 4-speed
- Middle exhaust

Ultimate torque:	85Nm (60ft/lb)
Free speed:	160 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	4.35m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.22kg
Stock No.	Part No.
84122	DAT-AR12



### 2 Draper Storm Force® Air Ratchet with Composite Body, 1/2" Sq. Dr.

- Low noise, low vibration
- Forward/reverse
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Rotating air inlet

Ultimate torque:	90Nm (66ft/lb)
Free speed:	160 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	5cfm (141L/min)
Vibration level:	2.6m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.4kg
Stock No.	Part No.
65034	SFAR12



### 3 Soft Grip Reversible Air Ratchet, 3/8" Sq. Dr.

- Expert Quality
- Low noise, low vibration
- Forward/reverse
- Rotating air inlet
- Rubber boot around head minimises in use damage

Ultimate torque:	68Nm (50ft/lb)
Free speed:	200 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	2.6m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.2kg
Stock No.	Part No.
47568	5224PRO



### 4 Air Ratchet, 3/8" Sq. Dr.

- Twin ratchet paws
- Stubby yoke
- Teaser trigger
- 360 degree turnable exhaust deflector
- 4-speed
- Middle exhaust

Ultimate torque:	85Nm (60ft/lb)
Free speed:	160 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	4.35m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.22kg
Stock No.	Part No.
84126	DAT-AR38



### 5 Draper Storm Force® Stubby Air Ratchet, 3/8" Sq. Dr.

- Low noise, low vibration
- Forward/reverse
- Rotating air inlet

Ultimate torque:	27Nm (20ft/lb)
Free speed:	200 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	3.1m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.51kg
Stock No.	Part No.
65019	SFMAR38



### 6 Draper Storm Force® Stubby Air Ratchet, 1/4" Sq. Dr.

- Low noise, low vibration
- Forward/reverse
- Rotating air inlet

Ultimate torque:	27Nm (20ft/lb)
Free speed:	230 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	3.1m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.51kg
Stock No.	Part No.
65018	SFMAR14





## 1 Reversible Keyless Air Drill, 13mm

- Ergonomic rubber protective grip and auxiliary handle
- Heavy duty full caged gear system for increased tool life
- Forward/reverse
- Quick-change keyless chuck
- Rotating air inlet
- Handle exhaust

Chuck size:	13mm
Free speed:	700 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	8cfm (226L/min)
Vibration level:	1.0m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.63kg
Stock No.	Part No.
84121	DAT-RAD13



## 2 Reversible Air Drill, 10mm

- Ergonomic rubber protective grip and auxiliary handle
- Heavy duty full caged gear system for increased tool life
- Forward/reverse
- Rotating air inlet
- Handle exhaust

Chuck size:	10mm
Free speed:	2,200 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	5.5cfm (155L/min)
Vibration level:	1.0m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.48kg
Stock No.	Part No.
83961	DAT-RAD10K



## 3 Composite Reversible Keyless Air Drill, 10mm

- Expert Quality
- Low noise, low vibration
- Composite body
- Reduces operator fatigue and the 'cold sink' effect
- Forward/reverse
- Rotating air inlet
- Planetary gear system
- Variable speed trigger
- Jacobs keyless chuck

Chuck size:	10mm
Free speed:	1800 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (114L/min)
Vibration level:	2.5m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.1kg
Stock No.	Part No.
14258	5276K/PRO



## 4 Draper Storm Force® Composite Reversible Keyless Air Drill, 10mm

- Low noise, low vibration
- Forward/reverse
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Planetary gear system
- 3/8" keyless chuck

Chuck size:	9.5mm
Free speed:	1800 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (114L/min)
Vibration level:	2.6m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.92kg
Stock No.	Part No.
65138	SFRAD



## 5 Reversible Keyless Air Drill, 10mm

- Ergonomic rubber protective grip and auxiliary handle
- Heavy duty full caged gear system for increased tool life
- Forward/reverse
- Quick-change keyless chuck
- Rotating air inlet
- Handle exhaust

Chuck size:	10mm
Free speed:	2,200 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	5.5cfm (155L/min)
Vibration level:	1.0m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.48kg
Stock No.	Part No.
83811	DAT-RAD10







**1**  
**Air Belt Sander, 10mm**

- Lightweight aluminium housing
- Rear exhaust
- Lever throttle for added speed control
- Ergonomic soft grip handle
- Easy belt replacement
- Suitable for jobs in narrow spaces and recessed corners
- Supplied with 3 different sanding belts (60, 80, 120 grit)

Overall length:	280mm
Belt width:	10mm
Belt length:	330mm
Free speed:	18,000rpm
Operating air pressure:	90 psi
Average air consumption:	6cfm (170L/min)
Vibration level:	4.8m/s <sup>2</sup>
Minimum hose size (ID):	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.78kg

**2**  
**Aluminium Oxide Sanding Belts, 10 x 330mm**

Cloth backed. For use with Draper Compact Belt Sanders and other manufacturers similar machines. Sold loose.

Stock No.	Part No.	Grit Grade
30348	A4262	40
30349	A4262	60
26931	A4262	80
26932	A4262	120



## 1 Dual Action Sander, 150mm

- Ergonomic design with rubber protective grip
- Dual action pad motion creates swirl-free finishes
- Keyless pad release mechanism
- Down exhaust directs air away from workpieces
- Lightweight aluminium housing

Pad size:	150mm
Free speed:	10,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	5cfm (141L/min)
Vibration level:	1.5m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.83kg

Stock No.	Part No.
83942	DAT-DAS

**STORM FORCE**



## 2 Draper Storm Force® Dual Action Air Palm Sander, 150mm

- Variable speed control lever
- Hook and loop backing pad
- Low vibration hand grip
- Palm trigger
- Rear exhaust for dust extraction

Pad size:	150mm
Free speed:	9000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (114l/min)
Minimum hose size (ID):	3/8" (10mm)
Air inlet:	1/4" BSP
Overall length:	175mm
Weight:	1.08kg

Stock No.	Part No.
70834	SFAS150MM

**STORM FORCE**



## 3 Draper Storm Force® Composite Dual Action Air Sander, 150mm

- Low noise, low vibration
- High speed mechanism
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- For use with a centralized dust extraction

Pad size:	150mm
Free speed:	10,500 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	3cfm (87L/min)
Vibration level:	6.3m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.88kg

Stock No.	Part No.
65084	DAT-APS-SF



## 4 Dual Action Air Sander, 150mm

- Orbital and rotary action
- Lightweight aluminium housing
- Ergonomic design for one-hand operation
- 2-in-1 central and non-vacuum design
- Rear exhaust

Pad size:	150mm
Free speed:	10,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.5cfm (127L/min)
Vibration level:	8.5m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.11kg

Stock No.	Part No.
84125	DAT-APS



## 5 Aluminium Oxide Sanding Discs

50 and 75mm, for use with the Draper Compact Dual Action Soft Grip Air Sander Kit and other manufacturers' similar machines. Packed 10 sheets per pack.

**Order number of packs required (10 sheets per pack)**

Stock No.	Part No.	Diameter	Grit Grade
48201	AAT04	50mm	320
48202	AAT05	50mm	400
48203	AAT06	50mm	600
48205	AAT07	75mm	320
48206	AAT08	75mm	400
48207	AAT09	75mm	600





**STORM  
FORCE**

**STORM  
FORCE**



### 1 Draper Storm Force® Mini Air Sander, 50mm

- Low noise, low vibration
- High speed mechanism
- Variable speed motor
- Rotating air inlet
- Hook and loop pads

Pad size:	50mm
Free speed:	15,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	3cfm (87L/min)
Vibration level:	4.5m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.62kg
Stock No.	Part No.
65059	SFAS50

### 2 Draper Storm Force® Compact Composite Air Sander, 75mm

- Low noise, low vibration
- High speed mechanism
- Twin speed motor
- For use with a centralized dust extraction

Pad size:	75mm
Free speed:	16,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	3.4m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.66kg

Stock No.	Part No.	Description
65069	SFAS75	Air Sander
75165	YFAS75-32	75mm Backing Pad
66499	YFAS50-49	50mm Backing Pad



### 3 Polycarbide Abrasive Pads

Packs of 10, superior abrasive pads. Perfect for surface preparation in metal fabrication and automotive refinishing workshops. Fitted with a quick change plastic screw on the back. Suitable for use on Draper Storm Force® compact sander 65069 and other manufacturers similar air tools. Every pad delivers a long life and fast effective cutting, saving both time and money. Display packed.

**Order number of packs required (10 discs per pack)**

Stock No.	Part No.	Size	Grit
75622	SCP2	50mm	Fine
75626	SCP3	75mm	Fine
75623	SCP2	50mm	Medium
75627	SCP3	75mm	Medium
75625	SCP2	50mm	Course
75628	SCP3	75mm	Course



### 4 Aluminium Oxide Sanding Discs

Packs of 10, superior fast cutting abrasive for surface preparation in metal fabrication and automotive refinishing workshops. Fitted with a quick change plastic screw on the back. Suitable for use on Draper Storm Force® compact sander 65069 and other manufacturers similar air tools. Assorted pack comprises 2 x 80, 2 x 120, 3 x 240 and 3 x 320 grit grades. Display packed.

**Order number of packs required (10 discs per pack)**

Stock No.	Part No.	Size	Grit Grade
75610	SD2AB	50mm	80
75611	SD2AB	50mm	120
75612	SD2AB	50mm	180
75613	SD2AB	50mm	240
75614	SD2AB	50mm	320
75615	SD2AB	50mm	Assorted
75616	SD3AB	75mm	80
75617	SD3AB	75mm	120
75618	SD3AB	75mm	180
75619	SD3AB	75mm	240
75620	SD3AB	75mm	320
75621	SD3AB	75mm	Assorted



## 1 Air Cut-Off Tool, 75mm

- Composite housing with compact design
- Rear exhaust
- Variable speed
- Lightweight aluminium housing
- 360° rotating guard
- Safety trigger prevents accidental starts
- Adjustable 4-speed regulator
- 360° rotating air inlet

Cutting wheel diameter:	75mm
Free speed:	20,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	5cfm (141L/min)
Vibration level:	2.38m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.84kg

Stock No.	Part No.
84124	DAT-ACT



## 2 Composite Air Angle Grinder, 115mm

- Expert Quality
- Low noise, low vibration
- Composite body
- Reduces operator fatigue and the 'cold sink' effect
- High strength, alloy, gear housing
- Steel throttle lever
- Rear exhaust
- 9 position wheel guard
- Spindle lock for easy disc change

Disc size:	115mm
Free speed:	12,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.0cfm (114L/min)
Vibration level:	2.5m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	2kg

Stock No.	Part No.
47572	5228PRO



## 3 Rubber Backing Pad, 100mm

For use with 100mm diameter cutting wheels and grinding discs. 3/8" UNF thread. Sold loose.

Stock No.	Part No.	Description	Diameter
27940	A4207P	Backing Pad	100mm



## 4 Air Angle Grinder, 100mm

- Safety lever trigger
- Adjustable built-in regulator
- Auxiliary side handle
- Governor mechanism
- Hardened steel beveled gears
- Top exhaust
- Low noise, low vibration
- Lightweight aluminium body

Disc size:	100mm
Free speed:	11,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	6.5cfm (184L/min)
Vibration level:	2.43m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.67kg

Stock No.	Part No.	Description
83953	DAT-AAG	Angle Grinder
58608	APT8	Backing Pad

**STORM FORCE**




## 5 Draper Storm Force® Air Angle Grinder, 100mm

- Adjustable safety guard
- Safety trigger
- Front exhaust
- Low vibration soft grip handle
- 1/4" BSP inlet

Disc size:	100mm
Free speed:	9000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	6.5cfm (184L/min)
Minimum hose size (ID):	3/8" (10mm)
Air inlet:	1/4" BSP
Overall length:	180mm
Weight:	1.38kg
Bore size:	16mm

Stock No.	Part No.
70832	SFAAAG

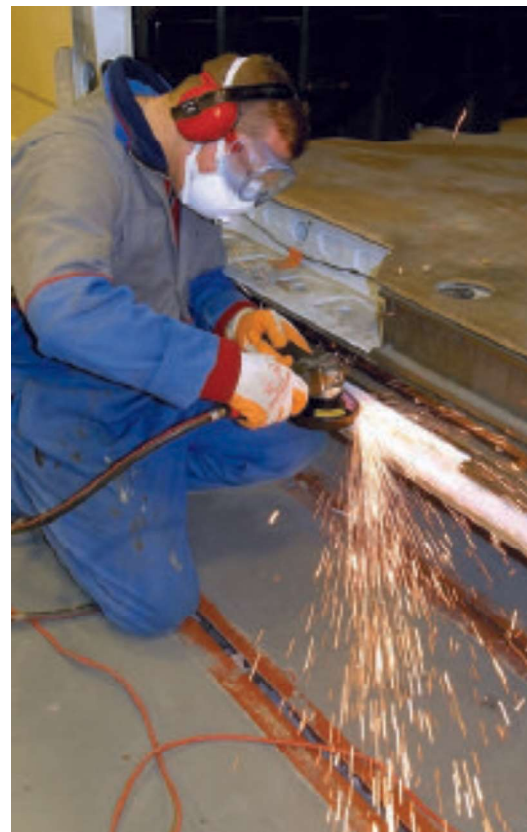

## 6 Depressed Centre Metal Grinding Wheels, 50mm

Resinoid bonded aluminium oxide, maximum working speed 50m/sec. For use with Compact Air Angle Grinders and other manufacturers' similar machines

Stock No.	Part No.	Grit Grade	Size
48208	AAT10	A60-Q-BF	50 x 9.6 x 4.0mm
48209	AAT11	A80-Q-BF	50 x 9.6 x 4.0mm
48210	AAT12	A120-Q-BF	50 x 9.6 x 4.0mm

**STORM  
FORCE**



**1**  
**Draper Storm Force® Composite Straight Mini Air Die Grinder, 6mm**

- Low noise, low vibration
- Variable speed
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Rotating air inlet
- Supplied with two open ended collet wrenches

Collet size:	6mm
Free speed:	25,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	7cfm (198L/min)
Vibration level:	0.9m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.35kg

Stock No.	Part No.
65130	SFAG



**2**  
**90° Compact Air Die Grinder, 6mm**

- Low noise, low vibration
- Variable speed
- Lightweight aluminium body
- Lever block trigger
- Rear exhaust
- 4-speed rear regulator

Collet size:	6mm
Free speed:	20,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.0cfm (113L/min)
Vibration level:	2.9m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.53kg

Stock No.	Part No.	Description
83769	DAT-ADG	Die Grinder
27942	A4217K	3mm Collet



**STORM  
FORCE**

**3**  
**Draper Storm Force® 90° Mini Air Die Grinder, 6mm**

- Low noise, low vibration
- Variable speed
- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Rotating air inlet
- Supplied with two open ended collet wrenches

Collet size:	6mm
Free speed:	20,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	7cfm (198L/min)
Vibration level:	1.4m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.55kg

Stock No.	Part No.
65137	SFAG90





## 1 Air Hammer Kit (6 Piece)

- Comprising a range of accessories including a tapered punch chisel, spot weld chisel, sheet metal trimmer chisel, straight chisel and panel cutter chisel.
- Manufactured from lightweight aluminium housing
- Ergonomic soft grip handle
- Fitted with a 1/4" BSP airline connector

Blows Per Minute:	3,000bpm
Stroke Length:	66mm
Chisel Shank:	10mm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.5cfm (127L/min)
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.97kg
Stock No.	Part No.
83738	DAT-AHK



## 2 Draper Storm Force® Composite Air Hammer and Chisel Kit (5 Piece)

- The composite body
- Reduces operator fatigue and the 'cold sink' effect
- Powerful blows per minute ratio

Blows per minute:	4,500bpm
Stroke length:	43mm
Chisel Shank:	10.18mm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.0cfm (114L/min)
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.1kg
Stock No.	Part No.
65142	SFAH4



## 3 Chisel Retaining Spring

For use with air hammers. Display packed.

Stock No.	Part No.
00092	YDAT-AHK-12



## 4 Air Chisel Attachments

For use with Draper Air Hammers and other manufacturers similar machines. Shank 10.18mm. All chisels must be used with a chisel retaining spring, Stock No.00092.

Stock No.	Part No.	Description
57800	A4202AK	Tailpipe Cutter Chisel
57801	A4202AK	Spot Weld Breaker Chisel
57802	A4202AK	Taper Punch
57803	A4202AK	Ripping Chisel
57804	A4202AK	Panel Cutting Chisel
59083	A4202AK	Metal Flanging Attachment



## 5 Needle Scaler

- Low noise, low vibration
- Lightweight aluminium housing
- 19 Needles
- Front exhaust

Blows per minute:	4,500bpm
Stroke length:	24mm
Needle size:	3mm x 180mm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4cfm (113L/min)
Vibration level:	9.4m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.95kg
Stock No.	Part No.
84131	DAT-ANS





## 1

### Air Body Saw

- Straight or scroll cutting on mild steel (1.2mm max)
- Adjustable work guard to control depth of cut
- Safety trigger to prevent accidental start
- Supplied with two saw blades (18T and 24T) and two hex keys

Working pressure:	90psi (6.2bar)
Average air consumption:	2.5cfm (78l/min)
Air inlet:	1/4"
Air hose size:	3/8"
Strokes per min:	10,000
Weight:	0.64 kg

Stock No.	Part No.
70833	DAT-ABSSG

## 2

### Air Body Saw Blades, 32tpi (Pack of 3)

Spare blades for air body saws and other manufacturers similar machines. Three blades per card.

**Order number of cards required (3 blades per card)**

Stock No.	Part No.
52283	A4275A-35C



## 3

### Air Nibbler

- Adjustable die for varied cutting directions
- Front exhaust

Working pressure:	90psi (6.2bar)
Average air consumption:	9.8cfm (278l/min)
Air inlet:	1/4"
Air hose size:	3/8"
Strokes per min:	3800
Length:	195mm
Weight:	0.83 kg

Stock No.	Part No.
70835	DAT-AN



## 4

### Air Shears

- Low noise, low vibration
- Lightweight aluminium housing
- Cuts aluminium
- Cuts plastics
- Cuts 1.2mm Steel and Tin
- Handle exhaust

Cutting capacity (mild steel):	18 Gauge (1.2mm)
Strokes per minute:	3,200spm
Operating air pressure:	90psi (6.3bar)
Average air consumption:	5.5cfm (1,132L/min)
Vibration level:	4.3m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.28kg

Stock No.	Part No.
84130	DAT-ASH

## 5


### Air Riveter Kit

- 6mm capacity
- Balanced for easy operation
- Comfortable trigger operation
- For aluminium alloy rivets only
- Stored in a convenient heavy duty storage case

Riveting capacity:	2.4, 3.2, 4.0 and 4.8mm
Traction power:	998kg
Operating air pressure:	60 - 90psi (4.1 - 6.2bar)
Average air consumption:	4.0cfm (115L/min)
Vibration level:	2.5m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.6kg

Stock No.	Part No.
33746	4296K



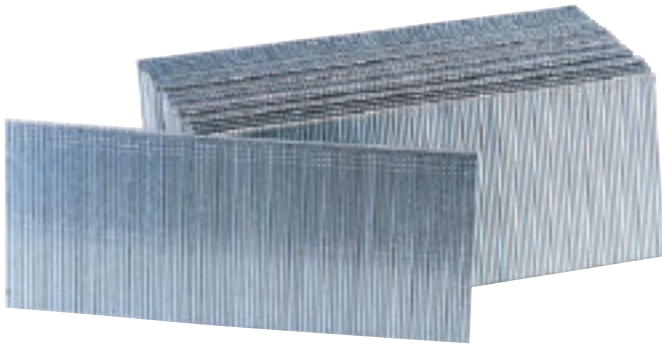

## 1

### Brad Nails

For use with Draper Nailers and Combination Nailer/Staplers and other manufacturers' similar machines. Sold in boxes of 5000.

Stock No.	Part No.	Length
59822	AAN10	10mm
59823	AAN15	15mm
59824	AAN20	20mm
59825	AAN25	25mm
59826	AAN30	30mm
59827	AAN32	32mm
59828	AAN35	35mm
59829	AAN38	38mm
59830	AAN40	40mm
59831	AAN45	45mm
59832	AAN50	50mm



## 2

### Draper Air Nailer, 10 - 50mm

- Quality cast aluminium housing
- Attached with a nail holder and soft grip handle
- Fitted with a safety bump mechanism
- Safety latch mechanism
- Stored in a convenient heavy duty storage case

Nail size:	10-50mm, Head 2mm, Gauge 18
Staple size:	N/A
Shank size:	Width 1.25mm, Thickness 1.05mm
Operating air pressure:	75 - 100psi
Average air consumption:	0.26cfm (0.75L/min)
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.4kg

Stock No.	Part No.
14607	DAT-ANK2050



## 3

### Draper Air Stapler/Nailer

- Quality cast aluminium housing
- Attached with a nail holder and soft grip handle
- Fitted with a safety bump mechanism
- Safety latch mechanism
- Stored in a convenient heavy duty storage case

Nail size:	10-50mm, Head 2mm, Gauge 18
Staple size:	12-40mm, Crown 5.7mm, Gauge 18
Shank size:	Width 1.25mm, Thickness 1.05mm
Operating air pressure:	75 - 100psi
Average air consumption:	0.28cfm (0.8L/min)
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.45kg

Stock No.	Part No.
14609	DAT-ACK1550



## 4

### Staples

For use with Draper staplers and other manufacturers similar machines.

**Order number of boxes required (see table)**

Stock No.	Part No.	Length	Crown	Gauge	Quantity
59833	AAS8	8mm	5.1mm	20	10,000
59834	AAS10	10mm	5.1mm	20	10,000
59835	AAS13	13mm	5.1mm	20	5000
59836	AAS16	16mm	5.1mm	20	5000
59837	AAS19	19mm	5.1mm	20	5000
59838	AAS22	22mm	5.1mm	20	5000
59839	AAS25	25mm	5.1mm	20	5000
17553	SFS	32mm	5.7mm	18	2500
17555	SFS	38mm	5.7mm	18	2500



**1**  
**Air Tool Kit (68 Piece)**

- Indispensable air tool kit
- Designed to provide all the essentials for the workshop
- Includes a 1/2" inch impact wrench, 3/8" inch air ratchet, air chisel, die grinder and two blow guns along with a host of specialist accessories
- Stored in a convenient heavy duty storage case

**1/2" Air Impact Wrench**

Ultimate torque:	340Nm (250ft/lb)
Free speed:	7,500 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.0cfm (114L/min)
Sound pressure level:	87dBA
Sound power level:	98dBA
Vibration level:	3.3m/s <sup>2</sup>
Min. hose size:	3/8" I/D
Air inlet:	1/4" BSP
Weight:	1.8kg

**3/8" Air Ratchet**

Ultimate torque:	90Nm (66ft/lb)
Free speed:	160 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	5cfm (142L/min)
Sound pressure level:	94dBA
Sound power level:	105dBA
Vibration level:	2.6m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1. kg

Stock No.	Part No.
83431	SFATK/68

**Air Hammer**

Chisel shank opening:	10.18mm
Blows per minute:	4500
Stroke length:	43mm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.0cfm (114L/min)
Sound pressure level:	95dBA
Sound power level:	106dBA
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	1.1kg

**Die Grinder**

Collet size:	6mm
Free speed:	22,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	7cfm (198L/min)
Sound pressure level:	97dBA
Sound power level:	108dBA
Vibration level:	0.9m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.58kg



**2**  
**14 Piece Air Impact Wrench Kit (1/2" Square Drive)**

- Twin hammer air impact wrench
- Lightweight aluminium housing
- Ergonomic soft grip handle
- Three speed reversible motor
- Stored in a convenient heavy duty storage case
- Draper 6 months parts and labour warranty

Ultimate torque:	680Nm (500ft/lb)
Free speed:	7,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	6.5cfm (184L/min)
Vibration level:	4.35m/s <sup>2</sup>
Min. hose size:	3/8" I/D
Air inlet:	1/4" BSP
Weight:	2.59kg

Stock No.	Part No.
83985	DAT-AIWK



**3**  
**Air Die Grinder Kit (15 Piece)**

- Low noise, low vibration
- Adjustable 4-speed rear regulator
- Variable speed
- Lightweight aluminium body
- Lever block trigger
- Rotating air inlet
- Adjustable exhaust deflector
- Stored in a convenient heavy duty storage case

Collet size:	6mm
Free speed:	25,000 rpm
Operating air pressure:	90psi (6.2bar)
Average air consumption:	4.0cfm (113L/min)
Vibration level:	2.9m/s <sup>2</sup>
Min. hose size:	3/8" (10mm)
Air inlet:	1/4" BSP
Weight:	0.39kg

Stock No.	Part No.	Description
83736	DAT-AGK	Die Grinder Kit
27942	A4217K	3mm Collet



## 1 Air Blow Gun

Suitable for cleaning liquid, swarf or dust during manufacture or assembly, enabling a precise control of air flow. The kit includes a standard (single hole) zinc nozzle and also a pepperpot (multi-hole) brass safety nozzle. The tool body is made from aluminium with a steel lever and the air inlet thread is 1/4" BSP.

Stock No.	Part No.
70829	DAT-ABG



## 2 Long Reach Air Blow Gun

Suitable for cleaning liquid, swarf or dust during manufacture or assembly, enabling a precise control of air flow. The long reach nozzle is perfect to allow easier and safer access when working on machinery. The tool body is made from aluminium with a steel lever and the air inlet thread is 1/4" BSP.

Stock No.	Part No.
70830	DAT-ABGLR



## 3 Air Blow Gun

Suitable for cleaning liquid, swarf or dust during manufacture or assembly. Aluminium body with trigger and single hole nozzle. 1/4" BSP air inlet. Maximum operating pressure 30psi (2bar). Display packed.

Stock No.	Part No.
43134	DG10



## 4 Air Blow Gun - Stubby

Expert Quality, a superior air gun manufactured from die cast aluminium. Each air blower is manufactured with a distinctive and unique 'venturi' system, which delivers a 15% increased performance while providing safety by operating as a bypass system if the nozzle is blocked. Fitted with a variable flow trigger and 1/4" air hose inlet. Display packed.

Stock No.	Part No.
59781	ABG1



## 5 Air Blow Gun - Needle Nose

Expert Quality, a superior air gun manufactured from die cast aluminium. Each air blower is manufactured with a distinctive and unique 'venturi' system, which delivers a 15% increased performance while providing safety by operating as a bypass system if the nozzle is blocked. Fitted with a variable flow trigger and 1/4" air hose inlet. Display packed.

Stock No.	Part No.
59802	ABG2



## 6 Long Reach Air Blow Guns

Suitable for cleaning liquid, swarf or dust during manufacture or assembly. Supplied with safety nozzle. 1/4" BSP air inlet.

Stock No.	Part No.	Nozzle Length
16434	4298B	100mm
16435	4298B	280mm
16436	4298B	325mm
16437	4298B	500mm



## 7 Air Blow Gun - 300mm

Expert Quality, superior air gun manufactured from die cast aluminium. Each air blower is manufactured with a distinctive and unique 'venturi' system, which delivers a 15% increased performance while providing safety by operating as a bypass system if the nozzle is blocked. Fitted with a variable flow trigger, 1/4" air hose inlet and extra long nose. Display packed.

Stock No.	Part No.
59810	ABG4



## 8 Air Blow Gun - Right Angle - 560mm

Expert Quality, superior air gun manufactured from die cast aluminium. Each air blower is manufactured with a distinctive and unique 'venturi' system, which delivers a 15% increased performance while providing safety by operating as a bypass system if the nozzle is blocked. Fitted with a variable flow trigger, 1/4" air hose inlet and extra long right angled nozzle. Display packed.

Stock No.	Part No.
59816	ABG5





### 1 Gravity Feed HVLP Composite Body Air Spray Gun (100ml)

- Composite body
- For use with all paints
- Stainless steel needle and nose
- Maximum paint transfer efficiency
- Minimal "bounce-back"

Fluid delivery rate:	70-110ml/min
Fluid nozzle size:	1.0mm
Operating air pressure:	43psi (2 Bar)
Average air consumption:	8cfm (226 l/min)
Air inlet:	1/4" BSP
Weight:	1.8kg

Stock No.	Part No.	Description
09709	GSG5-COMP-100	Spray Gun
13836	AGSG5-100 0.8	0.8mm Spares Set
13837	AGSG5-100 1.0	1.0mm Spares Set



### 2 Gravity Feed HVLP Composite Body Air Spray Gun, 600ml

- Composite body
- For use with all paints
- Stainless steel needle and nose
- Maximum paint transfer efficiency
- Minimal "bounce-back"

Fluid delivery rate:	190-250ml/min
Fluid nozzle size:	1.4mm
Operating air pressure:	43psi (3 Bar)
Average air consumption:	14.5cfm (400 l/min)
Air inlet:	1/4" BSP
Weight:	0.375kg

Stock No.	Part No.	Description
09707	GSG5-COMP-600	Spray Gun
13843	AGSG5-600 1.4	1.4mm Spares Set
13844	AGSG5-600 1.7	1.7mm Spares Set
13845	AGSG5-600 2.0	2.0mm Spares Set



### 3 Gravity Feed HVLP Air Spray Gun, 100ml

- Full metal body
- For use with all paints
- Maximum paint transfer efficiency
- Minimal "bounce-back"

Fluid delivery rate:	70-110ml/min
Fluid nozzle size:	1.0mm
Operating air pressure:	43psi (3 Bar)
Average air consumption:	8cfm (226 l/min)
Air inlet:	1/4" BSP
Weight:	0.276kg

Stock No.	Part No.	Description
09708	GSG5-100	Spray Gun
13836	AGSG5-100 0.8	0.8mm Spares Set
13837	AGSG5-100 1.0	1.0mm Spares Set



### 4 Gravity Feed HVLP Air Spray Gun, 600ml

- Full metal body
- For use with all paints
- Maximum paint transfer efficiency
- Minimal "bounce-back"

Fluid delivery rate:	190-250ml/min
Fluid nozzle size:	1.4mm
Operating air pressure:	43psi (3 Bar)
Average air consumption:	14.5cfm (400 l/min)
Air inlet:	1/4" BSP
Weight:	0.55kg

Stock No.	Part No.	Description
09706	GSG5-600	Spray Gun
13843	AGSG5-600 1.4	1.4mm Spares Set
13844	AGSG5-600 1.7	1.7mm Spares Set
13845	AGSG5-600 2.0	2.0mm Spares Set



## 1 Gravity Feed Air Spray Gun, 500ml

- HVLP (high volume low pressure) spray gun
- Variable fan position and fully adjustable airflow
- Maximum paint transfer efficiency with minimal bounce back
- Suitable for use with all paint types including water based
- Supplied with 1/4" BSP airline connector

Air consumption:	14 cfm
Nozzle size:	1.5mm
Air inlet:	1/4"
Maximum operating pressure:	60psi (4.1 bar)
Weight:	0.33kg

Stock No.	Part No.
92971	GSG5-500ML



## 2 Air Spray Gun, 1L

- Suitable for most paints
- Fully adjustable spray pattern
- Dual action trigger

Fluid delivery rate:	180 - 240cc/min
Fluid nozzle size:	1.8mm
Operating air pressure:	50-60psi (3-4 Bar)
Average air consumption:	7cfm (200 l/min)
Air inlet:	1/4" BSP
Weight:	1.0kg

Stock No.	Part No.
21526	4212HP



## 3 Air Tool Kit (5 Piece)

- For hobbyist and semi-professional users alike
- Designed for use with receiver compressors
- Solutions for spraying, inflating and cleaning

Stock No.	Part No.
81508	4315AK





## 1 Air Brush Kit (7 Piece)

Air brush kit ideal for base coating, stencilling and touch-up projects. Precision air brush gun with an adjustable spray pattern from 6.3-12.7mm. Complete with accessories including 1/4" adaptor, 1.5m air hose and glass paint pots. Supplied in a plastic case with transparent lid.

### Contents:

- 1 x Precision air brush gun
- 1 x 1.5m Air hose
- 1 x M5 (male) x 1/4" Adaptor (female) air inlet
- 1 x Connection adaptor for compressed air canister
- 2 x 22ml Glass paint pots
- 1 x Dropper

Stock No.	Part No.
70831	DAT-ABK6



## 2 Air Grease Gun (400cc)

- Supplied with two delivery tubes
- Bulk loading and air bleed valves
- Plunger rod and handle

Working pressure range:	30-120psi (2-8.2bar)
Air inlet:	1/4"
Air hose size:	3/8"
Capacity:	400cc (14oz)
Max outlet pressure:	4500psi (310bar)
Angle delivery nozzle:	170mm
Flexible delivery nozzle:	270mm
Weight:	1.40 kg

Stock No.	Part No.
70836	DAT-AGG



## 3 Air Operated Underbody Coating Gun

- Air powered and designed for general automotive and industrial applications
- Ideal for rustproofing and suitable for various primer and sub-coat paints
- Accepts most types of 1L coating tins
- Made from lightweight aluminium
- Supplied with 1/4" BSP adaptor

Air inlet:	1/4" BSP
Rated air pressure:	30-120psi
Maximum air pressure:	150psi
Air consumption:	270 L/min
Recommended air pressure:	2-4 bar
Weight:	0.29kg

Stock No.	Part No.
13198	DAT-GUCG



## 4 Air Operated Flexible Nozzle Underbody Coating Gun

- Air powered and ideal for rustproofing vehicle chassis
- 300mm flexible nozzle for accurate spraying and access to confined areas
- Accepts most types of 1L coating tins
- Made from lightweight aluminium
- Supplied with 1/4" BSP adaptor

Air inlet:	1/4" BSP
Rated air pressure:	30-120psi
Maximum air pressure:	150psi
Air consumption:	270 L/min
Recommended air pressure:	2-4 bar
Weight:	0.34kg

Stock No.	Part No.
15875	DAT-UCG



## 5 Air Caulking Gun

- Trigger control for smooth application
- Compatible with standard C3 (215 x 50mm) cartridges
- Connected using a supplied 1 x 1/4" BSP connector

Working pressure:	90psi
Air consumption:	170l/min
Air inlet:	1/4"
Min hose size:	3/8"
Cartridge holder bore size:	50mm
Cartridge holder length:	215mm
Product dimensions:	L 290 x W 168 x H 50mm
Weight:	0.92 kg

Stock No.	Part No.
30911	DAT-ACG



## 6 750ml Air Paraffin/Washing Gun

- Sprays a wide range of oils, cleaning agents and rust proofing liquids
- Fitted with adjustable nozzle

Operating air pressure:	40-90psi (2.8-6.2bar)
Air inlet:	1/4" BSP
Weight:	0.5kg

Stock No.	Part No.
43135	4287A





## 1 Digital Gauge Air Line Inflator with Twin Connectors

Compliant with BS EN12645

- Expert Quality
- Digital air line gauge
- Highly accurate industrial quality
- Suitable for use on garage forecourts and tyre fitting bays
- Fitted with a large LCD backlit screen with multi-pressure unit and twin connectors
- Supplied with calibration certificate and two AAA batteries.

Pressure range:	0.3-17.2 bar/4-250psi
Min air supply:	3bar / 44psi
Max air supply:	18bar / 260psi
Operating temp range:	-15 ~ 55°C
Supply inlet:	1/4" BSP taper (F)
Hose length:	0.53m

Stock No.	Part No.	Description
74839	DAC403	Airline
61833	DLR03/HD	Batteries (4 x AAA)



## 2 Hi-Flo Inflator with Lock-On Connector

Manufactured and certified to Directive 86/217/EEC

- Expert Quality,
- Improved MK4 version airline inflator
- Industrial quality suitable for use on garage forecourts and tyre fitting bays
- Fitted with lock-on connector, 20% larger viewing window, hardier yet lighter body and increased accuracy
- Supplied with calibration certificate

Pressure range:	0-9.6bar/0-138psi
Min air supply:	6.9bar/100psi
Max air supply:	13.8bar/200psi
Operating temp range:	10 to 60 degree C
Supply inlet:	1/4" BSP taper (F)
Hose length:	0.5m

Stock No.	Part No.	Description
16230	ALG44	Gauge
30770	YRHA2121	Sp. Hose & Connector
30773	YC02E03	Sp. Connector



## 3 Hi-Flo Air Line Inflator with Twin Open Ended Connector

Manufactured and certified to Directive 86/217/EEC

- Expert Quality,
- Improved MK4 version airline inflator
- Industrial quality suitable for use on garage forecourts and tyre fitting bays
- Fitted with a twin open ended connectors, 20% larger viewing window, hardier yet lighter body and increased accuracy
- Supplied with calibration certificate

Pressure range:	0-9.6bar/0-138psi
Min air supply:	6.9bar/100psi
Max air supply:	13.8bar/200psi
Operating temp range:	10 to 60 degree C
Supply inlet:	1/4" BSP taper (F)
Hose length:	0.5m

Stock No.	Part No.	Description
16234	ALG43	Gauge
30769	YRHA2122	Sp. Hose & Connector
30771	YC01A03	Sp. Connector



## 4 PCL Airforce Analogue Tyre Inflator

Manufactured and certified to Directive 86/217/EEC

- Expert Quality
- Clip-on connector
- Shockproof
- Direct valve mechanism
- Ceramic sensor
- Displays psi and bar

Pressure range:	0-12bar / 174psi
Min air supply:	3bar / 44psi
Max air supply:	15bar / 218psi
Operating temp range:	-20 ~ 60°C
Supply inlet:	1/4" BSP taper (F)
Hose length:	1.8M

Stock No.	Part No.	Description
42599	TI AIRFORCE	Inflator
03258	YRHA233	Sp. Hose Connector



## 5 Air Line Inflator with Open Ended Clip On Connector

- Inflator with single open-ended clip on connector
- Allows fast and simple tyre inflation

Pressure range:	0.68-11bar/10-160psi
Min air supply:	5 PSI
Max air supply:	17.2bar/250psi
Operating temp range:	-10 ~ 50°C
Supply inlet:	1/4" BSP taper (F)
Hose length:	0.4M

Stock No.	Part No.
36633	4290B



## 6 Air Line Inflator with Twin Open Ended Push On Connector

- Inflator with twin open-ended push on connectors
- Allows fast and simple tyre inflation

Pressure range:	0.68-11bar/10-160psi
Min air supply:	5 PSI
Max air supply:	17.2bar/250psi
Operating temp range:	-10 ~ 50°C
Supply inlet:	1/4" BSP taper (F)
Hose length:	0.6M

Stock No.	Part No.
36632	4290

## 7 Pistol-Grip Air Inflator

- Suitable for use with motor vehicles, cycles, dinghies, etc.
- Clip-on connector
- Dial reads 0-12bar and 0-170psi (for guidance only)

Pressure range:	0-8bar/170psi
Min air supply:	1 Bar
Max air supply:	8 Bar
Operating temp range:	-20 up to +40°C
Supply inlet:	1/4" BSP taper (M)
Hose length:	0.39M



Stock No.	Part No.
10604	4288B

The pressure dial on this model is for guidance only and should be checked with a tyre pressure gauge to BS EN12645



**1**  
**12M Retractable Air Hose Reel**

- PVC air hose with 6.5mm bore
- Provides 10bar/145psi working/burst pressure
- 10mm thick airline, on a ratchet lock system 'stoppable' every 20cm (approx.)
- Attached to a 180° ceiling/wall mounting bracket
- Supplied with 1/4 BSP threaded connectors

Bore size:	6.5mm
Hose connection:	1/4 BSP thread
Max. working pressure:	10 bar (145psi)
Operating temperature:	-5 to 45°C

Stock No.	Part No.
15047	RAH12



**2**  
**Retractable Air Hose Reels**

- 3/8" PVC Hybrid hose providing greater flexibility in cold conditions
- 18/54bar max
- Slow return function for user safety
- Stops at any position for user comfort
- Wall mounting on 180° swivel bracket
- Internal rewind guide prevents hose tangling

Hose size:	8 x 12mm
Hose connection:	1/4 BSP thread
Max. working pressure:	14 bar (200psi)
Operating temperature:	-5 to 45°C

Stock No.	Part No.	Length
15048	RAH10	10m
15049	RAH30	30m



**3**  
**Retractable Air Hose Reel (15m)**

- Expert Quality
- Rubber hose providing greater flexibility in cold conditions
- 20bar/290psi
- Slow return function for user safety
- Stops at any position for user comfort
- Wall mounting on 180° swivel bracket

Hose size:	3/8"
Hose connection:	1/4 BSP thread
Max. working pressure:	20 bar (300psi)
Operating temperature:	-5 to 45°C

Stock No.	Part No.	Length
15050	RAH15	15m



**4**  
**Recoil Air Hose**

A kink resistant recoil type air hose which allows easier access in tight working areas. Perfect for the workshop and industrial user. The 10m hose contracts to a fraction of its working length when not in use, providing an excellent space saving and safer solution to a cluttered workspace. The hose is supplied with steel and silver spring protectors and solid brass 1/4" BSP male connectors with anti-kink coils.

Stock No.	Part No.
70828	RH10M



**5**  
**Air Hose Reel**

Air hose reel with polyethylene hose fitted with 1/4" BSP brass connectors. 20m of durable hose. Maximum working pressure of 20bar. Sturdy hose reel made from steel with floor standing frame and carry handle.

**Contents:**  
1 x Air Hose Reel

Stock No.	Part No.
70838	AH20M



## 1 7.6M Nylon Recoil Air Hoses

DIY recoil type air hose which allows good access to working areas. Supplied with spring protection guards and male brass end fittings, one 360° swivel the other fixed. Display packed.

Stock No.	Part No.	Size
52662	4225/1A	1/4" BSP male
52663	4225/2A	3/8" BSP male




## 2 11.5M Heavy Duty Nylon Recoil Air Hoses

### Hoses manufactured to BS5409 Specifications

Recoil type air hose which allows good access to working areas. For the workshop and industrial user. Supplied with spring protection guards and 360° swivel end male fittings. Maximum working pressure at 20°C - 1.4MPa (203psi). Display packed.

Stock No.	Part No.	Size
76981	4282C	1/4" BSP male
76982	4283C	3/8" BSP male

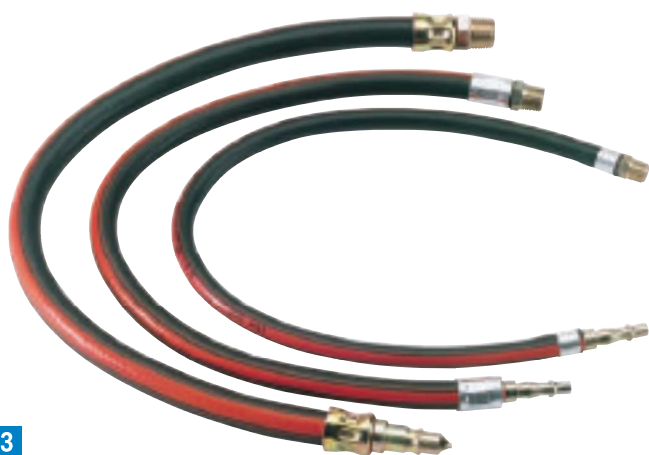

## 3 600mm Whip Hoses

### Manufactured to BS Specifications

Health and Safety Executive guidance regulations recommend a flexible isolating hose to be used between the air tool and coupling, thus isolating the tool's vibration. Supplied with PCL adaptor and appropriate male tailpiece. Display packed.

Stock No.	Part No.	Thread	Dimensions
54438	4311	1/4" BSP	7 x 14mm
54439	4312	3/8" BSP	10 x 17mm
54440	4313	1/2" BSP	13 x 21mm



## 4 Standard Air Tool Connection Kit, 1/4"

Air tool connection kit consisting of high pressure PVC hose, PCL coupling set and female coupling. Sold loose.

### Contents:

- 1 x Air line hose
- 1 x 15.2m x 1/4" bore
- 1 x Air line coupling set
- 1 x 1/4" BSP
- 1 x 1/4" Parallel female coupling

Stock No.	Part No.
64503	CONNECT KIT



## 1

### High Visibility Straight Line Air Hoses

PVC air line hoses for the workshop and industrial user, Supplied with male fittings. High visibility to draw attention to the trip hazard. Display packed.



Stock No.	Part No.	Size	Length	Connection	Description	Internal x External Diameter
23189	4318HV	6mm	15.2m	1/4" BSP Male	1.6MPa (232psi)	6 x 14mm
23190	4319HV	8mm	15.2m	1/4" BSP Male	1.6MPa (232psi)	8 x 16mm
23191	4320HV	10mm	15.2m	1/4" BSP Male	1.6MPa (232psi)	10 x 18mm
23192	4321HV	13mm	15.2m	1/2" BSP Male	1.0MPa (145psi)	13 x 21mm

## 2

### Straight Line Air Hoses

Manufactured to BS EN ISO 5774 Specifications

PVC air line hoses for the workshop and industrial user, Supplied with zinc plated fittings. Display packed.



Stock No.	Part No.	Size	Length	Connection	Description	Internal x External Diameter
38281	AH5M6	6mm	5m	1/4" BSP Male	16bar/230psi	6 x 14mm
38282	AH10M6	6mm	10m	1/4" BSP Male	16bar/230psi	6 x 14mm
38285	AH15M6	6mm	15m	1/4" BSP Male	16bar/230psi	6 x 14mm
38298	AH20M6	6mm	20m	1/4" BSP Male	16bar/230psi	6 x 14mm
38306	AH5M8	8mm	5m	1/4" BSP Male	16bar/230psi	8 x 16mm
38331	AH10M8	8mm	10m	1/4" BSP Male	16bar/230psi	8 x 16mm
38332	AH15M8	8mm	15m	1/4" BSP Male	16bar/230psi	8 x 16mm
38334	AH20M8	8mm	20m	1/4" BSP Male	16bar/230psi	8 x 16mm
38335	AH5M10	10mm	5m	1/4" BSP Male	16bar/230psi	10 x 18mm
38336	AH10M10	10mm	10m	1/4" BSP Male	16bar/230psi	10 x 18mm
38337	AH15M10	10mm	15m	1/4" BSP Male	16bar/230psi	10 x 18mm
38338	AH20M10	10mm	20m	1/4" BSP Male	16bar/230psi	10 x 18mm
38339	AH5M13	13mm	5m	1/2" BSP Male	16bar/230psi	13 x 21mm
38340	AH10M13	13mm	10m	1/2" BSP Male	16bar/230psi	13 x 21mm
38344	AH15M13	13mm	15m	1/2" BSP Male	16bar/230psi	13 x 21mm

## 3


### Straight Line Air Hoses

Manufactured to BS EN ISO 5774 Specifications

Expert Quality, nitrile rubber airline hoses designed for professional workshop use. The wipe clean oil resistant outer hose is perfect for workshop/garage forecourt applications where oil and grease are likely to be present. Its composite rubber manufacture delivers a better performance at lower temperatures (winter and external applications) than standard airlines. All these composite rubber airlines are Supplied with zinc coated fittings. Display packed.



Stock No.	Part No.	Size	Length	Connection	Description	Internal x External Diameter
38356	AHN15M6	6mm	15m	1/4" BSP Male	20bar/290psi	6 x 14mm
38360	AHN15M8	8mm	15m	1/4" BSP Male	20bar/290psi	8 x 16mm
38361	AHN15M10	10mm	15m	1/4" BSP Male	20bar/290psi	10 x 18mm

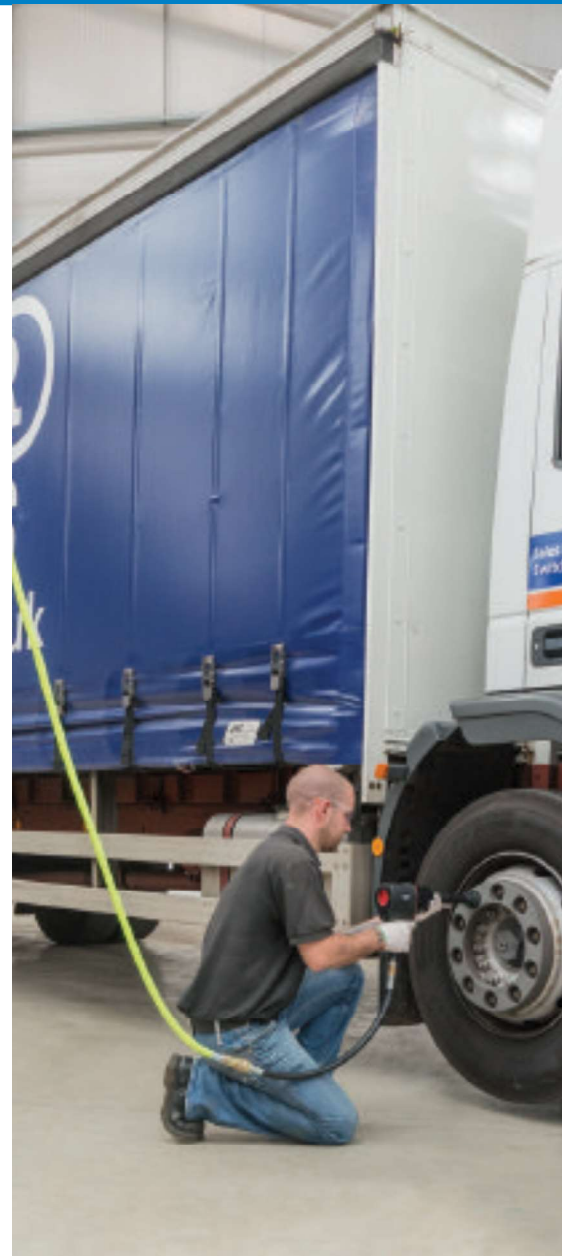

## 4

### 3/8" Heavy Duty Air Tool Connection Kit

Air tool connection kit consisting of high pressure PVC hose, whip hose, PCL male taper, female parallel and female safety couplings. Sold loose.

#### Contents:

- 1 x 15.2M x 3/8" air line hose
- 1 x 600mm x 1/4" whip hose
- 1 x Air line coupling set
- 1 x 1/4" parallel female coupling

Stock No.	Part No.
64508	CONNECT KIT HD



**1**  
**Air Tool Oil**

Gives outstanding performance at high and low temperatures. Contains extreme pressure (EP) additives for 'shock absorption'. For use with all pneumatic tools and equipment. Display packed.

Stock No.	Part No.	Volume
34681	ATO500	500ml
34682	ATO1000	1L



**2**  
**Air Mini Oiler**

Mini in-line oiler designed to feed oil mist lubrication to all 1/4" BSP inlet tools. Made from brass, fitted with a transparent plastic oil vessel and steel filler screw.

**Contents:**  
1x Air Mini Oiler

Stock No.	Part No.
70837	EAC



**3**  
**1/4" Male Double Union**

1/4" BSP male double union. Made from nickel plated steel.

Stock No.	Part No.
70859	EAC



**4**  
**1/4" Male Screw Adaptor (Pack of 2)**

1/4" BSP steel screw adaptor with tapered male threads.

Stock No.	Part No.
70860	EAC



**5**  
**1/4" Female Screw Adaptor (Pack of 2)**

1/4" BSP steel screw adaptor with tapered female threads.

Stock No.	Part No.
70861	EAC



**6**  
**1/4" Male Quick Coupling (Pack of 2)**

1/4" BSP steel male quick coupling.

Stock No.	Part No.
70863	EAC



**7**  
**1/4" Female Quick Coupling (Pack of 2)**

1/4" BSP steel female quick coupling.


Stock No.	Part No.
70864	EAC



**8**  
**1/4" Swivel Connector**

1/4" BSP swivel connector with 1 x male thread and 1 x female thread. Manufactured from aluminium and steel.

Stock No.	Part No.
70865	EAC

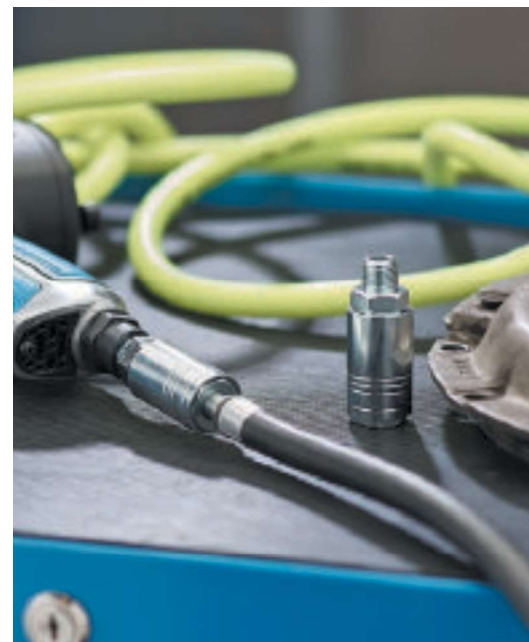





**1**  
**1/4" BSP Female Coupling Screw Adaptors (Pack of 5)**

1/4" screw adaptors with parallel female threads. Display packed five adaptors per card.

**Order number of cards required (5 per card)**

Stock No.	Part No.	Thread	Type
81297	EAC	1/4"	Female



**2**  
**1/4" BSP Male Coupling Screw Adaptors (Pack of 5)**

1/4" screw adaptors with tapered male threads. Display packed five adaptors per card.

**Order number of cards required (5 per card)**

Stock No.	Part No.	Thread	Type
81296	EAC	1/4"	Male



**3**  
**1/4" BSP Air Line Coupling Set (3 Piece)**

Quick release action coupler and male and female threaded adaptors, providing the user with maximum versatility. Display packed.

**Contents:**

- 1 x 1/4" BSP tapered male thread screw adaptor
- 1 x 1/4" BSP parallel female thread screw adaptor
- 1 x 1/4" BSP parallel female thread coupling adaptor

Stock No.	Part No.
81295	EAC



**4**  
**1/4" BSP Air Line Quick Couplings**

Particularly suitable for compressor outlets and trailing hose applications, the safety design prevents accidental disconnection. Suitable for use with standard adaptors. Display packed.

Stock No.	Part No.	Thread
81299	EAC	Female
81300	EAC	Male



**5**  
**1/4" BSP Air Line Coupling Set (3 Piece)**

Couplers/adaptors that will allow the user maximum versatility and quick release facility. Display packed.

**Contents:**

- 1 x screw adaptor male thread 1/4" BSP taper
- 1 x Coupling adaptor female thread 1/4" BSP parallel
- 1 x Screw adaptor female thread 1/4" BSP taper

Stock No.	Part No.
37844	ACK2 (3.8)



**6**  
**PCL Vertex Slim Air Line Couplings (display packed)**

For use with standard adaptors. BSP taper. Double action mechanism prevents accidental disconnection and makes the coupling particularly suitable for trailing hose applications. Maximum airflow rate 1197L/min (42cfm) at 6.9bar (100psi). Maximum working pressure 13.8bar (200psi). Display packed.

Stock No.	Part No.	Thread	Type
51401	A91CF02 PACKED	1/4"	Female
51402	A91CM02 PACKED	1/4"	Male
51404	A91EF02 PACKED	3/8"	Female
51409	A91EM02 PACKED	3/8"	Male
51407	A91JF02 PACKED	1/2"	Female
51411	A91JM02 PACKED	1/2"	Male



**7**  
**PCL Vertex Slim Air Line Couplings (sold loose)**

For use with standard adaptors. BSP taper. Double action mechanism prevents accidental disconnection and makes the coupling particularly suitable for trailing hose applications. Maximum airflow rate 1197L/min (42cfm) at 6.9bar (100psi). Maximum working pressure 13.8bar (200psi). Sold loose.

Stock No.	Part No.	Thread	Type
51384	A91CF02 BULK	1/4"	Female
51385	A91CM02 BULK	1/4"	Male
51403	A91EF02 BULK	3/8"	Female
51408	A91EM02 BULK	3/8"	Male
51406	A91JF02 BULK	1/2"	Female
51410	A91JM02 BULK	1/2"	Male



**8**  
**BSP Female Parallel 'Safeflow' Air Line Coupling**

Enhanced fitting with two stage self-venting release. Prevents hose-whip and creates safe compressed air environment. Female BSP parallel and male taper types available.

Stock No.	Part No.	Thread	Type
41879	ASC21CF BULK	1/4"	Female





## 1 PCL Vertex Slim Air Line Coupling Body Tailpieces (display packed)

For use with standard adaptors. Double action mechanism prevents accidental disconnection and makes the coupling particularly suitable for trailing hose applications. Maximum airflow rate 1197L/min (42cfm) at 6.9bar (100psi). Maximum working pressure 13.8bar (200psi). Display packed.

Stock No.	Part No.	Bore	For Hose
51414	A91R02 PACKED	1/4"	6.35mm
51416	A91S02 PACKED	5/16"	8.0mm
51418	A91T02 PACKED	3/8"	10.0mm

## 2 PCL Vertex Slim Air Line Coupling Body Tailpieces (sold loose)

Stock No.	Part No.	Bore	For Hose
51412	A91R02 BULK	1/4"	6.35mm
51415	A91S02 BULK	5/16"	8.0mm
51417	A91T02 BULK	3/8"	10.0mm



## 7 PCL Standard and Vertex Air Line Coupling Screw Adaptor (display packed)

Screw adaptor, female thread 1/4" parallel. Display packed five adaptors per card.

**Order number of cards required (5 per card)**

Stock No.	Part No.	Thread	Type
55061	A2746 PACKED	1/4"	Female

## 8 PCL Standard and Vertex Air Line Coupling Screw Adaptor (sold loose)

Screw adaptor, female thread 1/4" parallel. Sold loose.

Stock No.	Part No.	Thread	Type
55060	A2746 BULK	1/4"	Female



## 3 PCL "airflow" Couplings (display packed)

For use with standard adaptors. BSP parallel. Positive lock single action ideally suited for most compressed air applications. Maximum airflow rate 1197L/min (42cfm) at 6.9bar (100 psi). Maximum working pressure 13.8bar (200psi). Display packed.

Stock No.	Part No.	Thread	Type
37828	A21CF02 PACKED	1/4"	Female
37834	A21CM02 PACKED	1/4"	Male
37830	A21EF02 PACKED	3/8"	Female
37836	A21EM02 PACKED	3/8"	Male
37832	A21JF02 PACKED	1/2"	Female
37838	A21JM02 PACKED	1/2"	Male

## 4 PCL "airflow" Couplings (sold loose)

Stock No.	Part No.	Thread	Type
37827	A21CF02 BULK	1/4"	Female
37833	A21CM02 BULK	1/4"	Male
37829	A21EF02 BULK	3/8"	Female
37835	A21EM02 BULK	3/8"	Male
37831	A21JF02 BULK	1/2"	Female
37837	A21JM02 BULK	1/2"	Male



## 9 PCL Standard and Vertex Air Line Coupling Screw Adaptors (display packed)

Screw adaptor, male thread BSP taper. Display packed five adaptors per card.

**Order number of cards required (5 per card)**

Stock No.	Part No.	Thread	Type
25832	A2593 PACKED	1/4"	Male
25835	A6909 PACKED	3/8"	Male

## 10 PCL Standard and Vertex Air Line Coupling Screw Adaptors (sold loose)

Screw adaptor, male thread BSP taper. Sold loose.

Stock No.	Part No.	Thread	Type
25790	A2593 BULK	1/4"	Male
25793	A6909 BULK	3/8"	Male



## 5 PCL Coupling Body Tailpieces (display packed)

For use with standard adaptors. Positive lock single action ideally suited for most compressed air applications. Maximum airflow rate 1197L/min (42cfm) at 6.9bar (100 psi). Maximum working pressure 13.8bar (200psi). Display packed.

Stock No.	Part No.	Thread	For Hose
37840	A21R02 PACKED	1/4"	1/4" ID
37842	A21T02 PACKED	3/8"	3/8" ID

## 6 PCL Coupling Body Tailpieces (sold loose)

Stock No.	Part No.	Thread	For Hose
37839	A21R02 BULK	1/4"	1/4" ID
37841	A21T02 BULK	3/8"	3/8" ID





**1**  
**PCL Standard and Vertex Air Line Coupling Adaptor Tailpieces (display packed)**

Integral adaptor/tailpieces. Display packed five tailpieces per card.

**Order number of cards required (5 per card)**

Stock No.	Part No.	Bore	For Hose
25836	A2486 PACKED	3/16"	4.75mm
25834	A1793 PACKED	1/4"	6.35mm
25837	A2487 PACKED	5/16"	7.9mm
25839	A2488 PACKED	3/8"	9.5mm

**2**  
**PCL Standard and Vertex Air Line Coupling Adaptor Tailpieces (sold loose)**

Integral adaptor/tailpieces. Sold loose.

Stock No.	Part No.	Bore	For Hose
25794	A2486 BULK	3/16"	4.75mm
25792	A1793 BULK	1/4"	6.35mm
25795	A2487 BULK	5/16"	7.9mm
25796	A2488 BULK	3/8"	9.5mm



**7**  
**PCL M100 Series Air Line Coupling Adaptor Tailpieces (display packed)**

Integral adaptor/tailpieces. Display packed two tailpieces per card.

**Order number of cards required (2 per card)**

Stock No.	Part No.	Bore	For Hose
25860	A3037 PACKED	3/8"	9.5mm
25859	A3036 PACKED	1/2"	12.7mm

**8**  
**PCL M100 Series Air Line Coupling Adaptor Tailpieces (sold loose)**

Integral adaptor/tailpieces. Sold loose.

Stock No.	Part No.	Bore	For Hose
25818	A3037 BULK	3/8"	9.5mm
25817	A3036 BULK	1/2"	12.7mm



**3**  
**PCL M100 Series Air Line Couplings (display packed)**

Designed for machine applications with high airflow demands. BSP taper. Maximum airflow rate 3420L/min (120cfm) at 6.9bar (100psi). Maximum working pressure 20.7bar (300psi). Display packed.

Stock No.	Part No.	Thread	Type
25856	A5JF02 PACKED	1/2"	Female
25857	A5JM02 PACKED	1/2"	Male

**4**  
**PCL M100 Series Air Line Couplings (sold loose)**

Designed for machine applications with high airflow demands. BSP taper. Maximum airflow rate 3420L/min (120cfm) at 6.9bar (100psi). Maximum working pressure 20.7bar (300psi). Sold loose.

Stock No.	Part No.	Thread	Type
25814	A5JF02 BULK	1/2"	Female
25815	A5JM02 BULK	1/2"	Male



**9**  
**PCL Male Screw Tailpieces (display packed)**

1/4" thread size with BSP taper. Display packed five tailpieces per card.

**Order number of cards required (5 per card)**

Stock No.	Part No.	Bore	For Hose
25842	A1205 PACKED	3/16"	4.75mm
25843	A1217 PACKED	3/8"	9.5mm
25840	A5656 PACKED	1/4"	6.35mm
25841	A1206 PACKED	5/16"	7.9mm
25844	A2479 PACKED	1/2"	12.7mm

**10**  
**PCL Male Screw Tailpieces (sold loose)**

1/4" thread size with 1/4" BSP taper. Sold loose.

Stock No.	Part No.	Bore	For Hose
25800	A1205 BULK	3/16"	4.75mm
25798	A5656 BULK	1/4"	6.35mm
25799	A1206 BULK	5/16"	7.9mm
25801	A1217 BULK	3/8"	9.5mm
25802	A2479 BULK	1/2"	12.7mm



**5**  
**PCL M100 Series Air Line Coupling Screw Adaptor (display packed)**

Screw adaptor, male thread BSP taper. Display packed two adaptors per card.

**Order number of cards required (2 per card)**

Stock No.	Part No.	Thread	Type
25858	A3035 PACKED	1/2"	Male

**6**  
**PCL M100 Series Air Line Coupling Screw Adaptor (sold loose)**

Screw adaptor, male thread BSP taper. Sold loose.

Stock No.	Part No.	Thread	Type
05517	A2999 BULK	3/8"	Male
25816	A3035 BULK	1/2"	Male



**11**  
**PCL Male Screw Tailpieces (display packed)**

3/8" thread size with BSP taper. Display packed three tailpieces per card.

**Order number of cards required (3 per card)**

Stock No.	Part No.	Bore	For Hose
28051	A6905 PACKED	5/16"	7.9mm
25861	A2951 PACKED	3/8"	9.5mm
25863	A2808 PACKED	1/2"	12.7mm

**12**  
**PCL Male Screw Tailpieces (sold loose)**

3/8" thread size with BSP taper. Sold loose.

Stock No.	Part No.	Bore	For Hose
27295	A6905 BULK	5/16"	7.9mm
25819	A2951 BULK	3/8"	9.5mm
25821	A2808 BULK	1/2"	12.7mm



**1**  
**PCL Male Screw Tailpiece (display packed)**

1/2" thread size with BSP taper. Display packed three tailpieces per card.

**Order number of cards required (3 per card)**

Stock No.	Part No.	Bore	For Hose
25864	A2954 PACKED	1/2"	12.7mm

**2**  
**PCL Male Screw Tailpiece (sold loose)**

1/2" thread size with BSP taper. Sold loose.

Stock No.	Part No.	Bore	For Hose
25822	A2954 BULK	1/2"	12.7mm



**7**  
**PCL Double Union (display packed)**

1/4" BSP taper. Display packed five unions per card.

**Order number of cards required (5 per card)**

Stock No.	Part No.
63357	A6560 PACKED

**8**  
**PCL Double Union (sold loose)**

1/4" BSP taper. Sold loose.

Stock No.	Part No.
63356	A6560 BULK



**3**  
**PCL Reducing Unions (display packed)**

BSP parallel.

**Order number of cards required.**

Stock No.	Part No.	Size	Type
25866	A6892 PACKED	*3/8 x 1/4"	F x F
25867	A6893 PACKED	*1/2 x 1/4"	F x F
25868	A6899 PACKED	†3/8 x 1/4"	M x M
25869	A6900 PACKED	†1/2 x 1/4"	M x M

**4**  
**PCL Reducing Unions (sold loose)**

BSP parallel. Sold loose.

Stock No.	Part No.	Size	Type
25824	A6892 BULK	3/8 x 1/4"	F x F
25826	A6899 BULK	3/8 x 1/4"	M x M
25825	A6893 BULK	1/2 x 1/4"	F x F
25827	A6900 BULK	1/2 x 1/4"	M x M



**9**  
**Y piece for PCL Twin Standard Coupling**

Supplied with no additional fittings. Sold loose.

Stock No.	Part No.
44256	SPR4279



**5**  
**PCL Parallel Socket (display packed)**

1/4" BSP. Display packed three sockets per card.

**Order number of cards required (3 per card)**

Stock No.	Part No.
25865	A6889 PACKED

**6**  
**PCL Parallel Socket (sold loose)**

1/4" BSP. Sold loose.

Stock No.	Part No.
25823	A6889 BULK



**10**  
**PCL Double Ended Hose Connector/Repairers (display packed)**

**Order number of cards required.**

Stock No.	Part No.	Size	For Hose
25847	A2984 PACKED	5/16"	7.9mm
25845	A2983 PACKED	1/4"	6.35mm
25852	A2985 PACKED	3/8"	9.5mm
25853	A2986 PACKED	1/2"	12.7mm

**11**  
**PCL Double Ended Hose Connectors/Repairers (sold loose)**

Sold loose.

Stock No.	Part No.	Size	For Hose
25805	A2984 BULK	5/16"	7.9mm
25803	A2983 BULK	1/4"	6.35mm
25810	A2985 BULK	3/8"	9.5mm
25811	A2986 BULK	1/2"	12.7mm

**12**  
**PCL Twin Standard Coupling (display packed)**

Supplied with two male 'airflow' couplings and one 'Vertex' tailpiece. Display packed.

Stock No.	Part No.
25855	A6103 PACKED

**13**  
**PCL Twin Standard Coupling (sold loose)**

Supplied with two male 'airflow' couplings and one 'Vertex' tailpiece. Sold loose.

Stock No.	Part No.
25813	A6103 BULK





1

### PCL Euro Couplings

- For heavy duty high flow applications
- BSP parallel
- Tested to over 1 million cycles
- Connects to most popular and European adaptor profiles (Cejn, Rectus etc.)
- Zinc passivated to significantly improve corrosion resistance
- Hard wearing steel construction, Sold loose.

Stock No.	Part No.	Size	Type
54407	AC71CF BULK	1/4"	Female
54404	AC71CM BULK	1/4"	Male
54408	AC71EF BULK	3/8"	Female
54405	AC71EM BULK	3/8"	Male
54409	AC71JF BULK	1/2"	Female
54406	AC71JM BULK	1/2"	Male



2

### PCL Euro Coupling Nut Adaptors

- For heavy duty high flow applications
- Tested to over 1 million cycles
- Connects to most popular and European adaptor profiles (Cejn, Rectus etc.)
- Zinc passivated to significantly improve corrosion resistance
- Hard wearing steel construction, Sold loose.

Stock No.	Part No.	Size	Type
54418	A7105 BULK	1/8"	F 1/8" BSP
54414	A7101 BULK	1/8"	M 1/8" BSP
54419	A7106 BULK	1/4"	F 1/4" BSP
54415	A7102 BULK	1/4"	M 1/4" BSP
54420	A7107 BULK	3/8"	F 3/8" BSP
54416	A7103 BULK	3/8"	M 3/8" BSP
54421	A7108 BULK	1/2"	F 1/2" BSP
54417	A7104 BULK	1/2"	M 1/2" BSP



3

### PCL Euro Coupling Hose Tailpieces

- For heavy duty high flow applications
- Tested to over 1 million cycles
- Connects to most popular and European adaptor profiles (Cejn, Rectus etc.)
- Zinc passivated to significantly improve corrosion resistance
- Hard wearing steel construction, Sold loose.

Stock No.	Part No.	Bore	For Hose
54410	AC7106 BULK	6mm	6mm
54411	AC7108 BULK	8mm	8mm
54412	AC7110 BULK	10mm	10mm
54413	AC7113 BULK	13mm	13mm

#### Q: Why use regulators for compressed air?

A: Different air tools require different air pressures. For example, Health & Safety legislation stipulates that air blow guns MUST work at, or below, 30psi. A large air nailer, however, needs a minimum of 60psi and will need up to 100psi when driving larger nails to prevent damage to the nail driver blade. Make sure you adjust the pressure to suit the tool every time.

#### Q: Why use lubricators for compressed air?

A: Except for spraying equipment, almost all other air tools require lubrication. Air tools are precision manufactured to close tolerances to get the best power and lightest weight. You would not run your car without oil - don't do it to your air tools! Lubricators can greatly extend the life of your air tools.

#### Q: Why use filters for compressed air?

A: When air is compressed, the water vapour in that air is also compressed. This water vapour then reforms as water and can contaminate compressor tanks and air lines and very quickly rust the inside of your air tools.

#### Q: Where should the filter/regulator/lubricator be in the air line?

A: In simple terms, as close to the air tool as possible when the tool is in use. This ensures any "downstream" contaminants are removed, that the lubricating oil is correctly dispersed, and that you are operating at the correct pressure.



4

### PCL Euro Adaptor Hose Tailpieces

- For heavy duty high flow applications
- Tested to over 1 million cycles
- Connects to most popular and European adaptor profiles (Cejn, Rectus etc.)
- Zinc passivated to significantly improve corrosion resistance
- Hard wearing steel construction
- Sold loose.

Stock No.	Part No.	Bore	For Hose
54422	A7109 BULK	4mm	4mm
54423	A7110 BULK	6mm	6mm
54424	A7111 BULK	8mm	8mm
54425	A7112 BULK	10mm	10mm
54426	A7113 BULK	13mm	13mm



5

### 1/4" BSP Combined Filter/Regulator Unit

Expert Quality, designed to eliminate moisture and particulates from the air flow. Polycarbonate screw - on transparent bowl with Aluminium housing. Manual/semi automatic drain with 40 micron filter. Maximum inlet pressure 10bar/145psi. Display carton.

Stock No.	Part No.
24332	ALFR1



6

### 1/2" BSP Combined Filter/Regulator Unit

Expert Quality, designed to eliminate moisture and particulates from the air flow. Polycarbonate screw - on transparent bowl with Aluminium housing. Manual/semi automatic drain with 40 micron filter. Maximum inlet pressure 10bar/145psi. Display carton.

Stock No.	Part No.
24338	ALFR2



7

### 1/4" BSP Regulator Unit

Expert Quality, used to reduce compressed air pressure. Integral locking device, maximum inlet pressure 15bar/220psi. with gauge dual marked bar and psi. Display carton.

Stock No.	Part No.
24329	ALR1



**1**  
**1/2" BSP Regulator Unit**

Expert Quality, used to reduce compressed air pressure. Integral locking device, maximum inlet pressure 15bar/220psi. with gauge dual marked bar and psi. Display carton.

Stock No.	Part No.
24334	ALR2



**2**  
**1/4" BSP Lubricator Unit**

Expert Quality, fitted with adjustable lubrication output. Maximum inlet pressure 10bar/145psi. Display carton.

Stock No.	Part No.
24330	ALL1



**3**  
**1/2" BSP Lubricator Unit**

Expert Quality, fitted with adjustable lubrication output. Maximum inlet pressure 10bar/145psi. Display carton.

Stock No.	Part No.
24336	ALL2



**4**  
**1/4" BSP Filter Unit**

Expert Quality, cleans and dries compressed air. Manual/Semi automatic drain with 40 micron filter. Maximum inlet pressure 10bar/145psi. Display carton.

Stock No.	Part No.
24331	ALF1



**5**  
**1/2" BSP Filter Unit**

Expert Quality, cleans and dries compressed air. Manual/Semi automatic drain with 40 micron filter. Maximum inlet pressure 10bar/145psi. Display carton.

Stock No.	Part No.
24337	ALF2



**6**  
**1/4" BSP Combined Filter/Regulator/Lubricator Unit (FRL)**

Expert Quality, designed to control output air pressure, eliminate moisture and contaminants from the air flow and to lubricate tools during use. Polycarbonate screw - on transparent bowl with Aluminium housing. Fitted with 40 micron filter. Maximum inlet pressure 10bar/145psi. Supplied with wall mounting bracket. Display carton.

Stock No.	Part No.
24326	ALFRL1



**7**  
**1/4" BSP Combined Filter/Regulator/Lubricator Unit**

Designed to control output air pressure, eliminate moisture and contaminants from airflow and to lubricate tools during use. The main body of this unit is aluminium with polished silver finish. The gauge has steel casing and is dual-marked with psi and Mpa. Steel screw-on transparent bowl. Manual/semi-automatic drain, fitted with 40-micron filter. Complete with wall bracket.

Stock No.	Part No.
70824	DFRL



**8**  
**1/4" BSP Filter/Regulator Unit**

Designed to eliminate moisture and particulates from the airflow. The main body of this unit is aluminium with polished silver finish. The gauge has steel casing and is dual-marked with psi and Mpa. Steel screw-on transparent bowl. Manual/semi-automatic drain, fitted with 40-micron filter. Complete with wall bracket.

Stock No.	Part No.
70826	DFR



**9**  
**1/2" BSP Combined Filter/Regulator/Lubricator Unit (FRL)**

Expert Quality, designed to eliminate moisture and contaminants from the air flow and lubricate tools prior to use. Polycarbonate screw - on transparent bowl with Aluminium housing. Fitted with 40 micron filter. Maximum inlet pressure 10bar/145psi. Supplied with wall mounting bracket. Display carton.

Stock No.	Part No.
24333	ALFRL2