

PRESSURE WASHERS, WATER PUMPS & GENERATORS

368-370 Pressure Washers

371-374 Water Pumps

375 Water Pump Accessories

376-378 Generators

PRESSURE WASHERS

Pages **368-370**



WATER PUMPS

Pages **371-374**



WATER PUMP ACCESSORIES

Pages **375**



GENERATORS

Pages **376-378**



STORM FORCE

1

Pressure Washer, 1400W, 105bar

- Auto control with total stop device
- 3m high pressure hose
- Also supplied with spray lance, turbo nozzle, detergent bottle, cleaning pin and inlet filter



Wattage:	1400
Working pressure (+/- 10%):	1015psi (70bar)
Max pressure (+/- 10%):	1523psi (105bar)
Working flow (+/- 10%):	5.5l/min
Max flow (+/- 10%):	6.8l/min
Hose length:	3m
Cable length:	5m
Weight:	6.5kg

Stock No.	Part No.	Description
98674	PW1400/70SF	Pressure Washer
02784	APW1400/70SFA3	Snow Foam Lance
01825	APW1400/70SFA1	Bicycle Cleaning Nozzle
01826	APW1400/70SFA2	Motorcycle Cleaning Nozzle
02013	APW1400/70SFA4	Compact Rotary Patio Cleaner

2

Pressure Washer, 1600W, 135bar

- Auto control with total stop device
- 5m high pressure hose
- Also supplied with spray lance, fixed brush, detergent bottle, turbo nozzle, cleaning pin and inlet filter



Wattage:	1600
Working pressure (+/- 10%):	1305psi (90bar)
Max pressure (+/- 10%):	1958psi (135bar)
Working flow (+/- 10%):	5.5l/min
Max flow (+/- 10%):	7.1l/min
Hose length:	5m
Cable length:	5m
Weight:	8kg

Stock No.	Part No.	Description
98676	PW1600/90D	Pressure Washer
02784	APW1400/70SFA3	Snow Foam Lance
02013	APW1400/70SFA4	Compact Rotary Patio Cleaner

3

Pressure Washer, 2200W, 165bar

- Auto control with total stop device
- Integrated detergent bottle
- Also supplied with spray lance, fixed brush, turbo nozzle, cleaning pin and inlet filter



Wattage:	2200
Working pressure (+/- 10%):	1595psi (110bar)
Max pressure (+/- 10%):	2393psi (165bar)
Working flow (+/- 10%):	6.3l/min
Max flow (+/- 10%):	8.2l/min
Hose length:	6m
Cable length:	5m
Weight:	11kg

Stock No.	Part No.	Description
98677	PW2200/110D	Pressure Washer
02784	APW1400/70SFA3	Snow Foam Lance
02013	APW1400/70SFA4	Compact Rotary Patio Cleaner

4

Pressure Washer, 2100W, 165bar

- Brushless induction motor
- Auto control with total stop device
- Stainless steel spray lance and patio cleaning attachment
- Integrated detergent bottle
- Also supplied with fixed brush, six quick nozzles (including turbo nozzle), cleaning pin and inlet filter



Wattage:	2100
Working pressure (+/- 10%):	1595psi (110bar)
Max pressure (+/- 10%):	2393psi (165bar)
Working flow (+/- 10%):	6.0l/min
Max flow (+/- 10%):	7.2l/min
Hose length:	6m
Cable length:	5m
Weight:	18kg

Stock No.	Part No.	Description
98678	PW2100/110D	Pressure Washer
01827	APW2100/110DA1	Snow Foam Lance



1

Pressure Washer, 2500W, 195bar

- Brushless induction motor
- Steel armoured 8m hose and stainless steel lance
- Auto control with total stop device
- Integrated detergent bottle
- Also supplied with fixed brush, six quick nozzles (including turbo nozzle), cleaning pin and inlet filter

Wattage:	2500
Working pressure (+/-10%):	1885psi (130bar)
Max pressure (+/-10%):	2828psi (195bar)
Working flow (+/-10%):	6.7l/min
Max flow (+/-10%):	8.0l/min
Hose length:	8m
Cable length:	5m
Weight:	25kg

Stock No.	Part No.	Description
98679	PW2500I/130D	Pressure Washer
01827	APW2100I/110DA1	Snow Foam Lance



1

Petrol Pressure Washer, 6.5HP

- Expert Quality
- For use where no mains power available
- 4 stroke petrol engine
- Working pump pressure 168bar; flow rate 7.9L/min (474L/hour); weight 30kg
- Supplied with 8M of heavy-duty hose, high-pressure metal trigger, detergent bottle, 1/2 inch plastic hose adaptor, five different nozzles and a fuel funnel with hose

Engine:	6.5HP
Max. pump pressure:	186bar (2700psi)
Flow rate:	7.9L/min (474L/hr)
Displacement:	196cc
Speed (no load):	3350-3550r/min
Weight (dry):	30kg

Stock No.	Part No.	Description
83818	PPW650	Pressure Washer
83820	APPW16	Heavy Duty Gun
83822	APPW18	8M High Pressure Hose
83824	APPW20	Lance
83825	APPW21	5 piece Nozzle Set



2


Petrol Pressure Washer, 13HP

- Expert Quality
- For use where no mains power available
- Brass pump head with pressure regulator
- 4 stroke petrol engine
- Working pump pressure: 234bar; flow rate: 12L/min (720L/hour); weight 55kg
- Supplied complete with 10M HP rubber hose with steel reinforcement, metal gun, 5 piece nozzle set, 1/2 inch plastic hose adaptor and a fuel funnel with hose.

Caution: Owing to the water pressure produced by this machine, it is unsuitable for use on domestic vehicles

Engine:	13HP
Max pressure:	262bar (3800psi)
Flow rate:	12L/min (720L/hr)
Displacement:	389cc
Speed (no load):	3350-3550r/min
Weight (dry):	55kg

Stock No.	Part No.	Description
83819	PPW1300	Pressure Washer
83821	APPW17	Heavy Duty Gun
83823	APPW19	8M High Pressure Hose
83824	APPW20	Lance
83825	APPW21	5 piece Nozzle Set

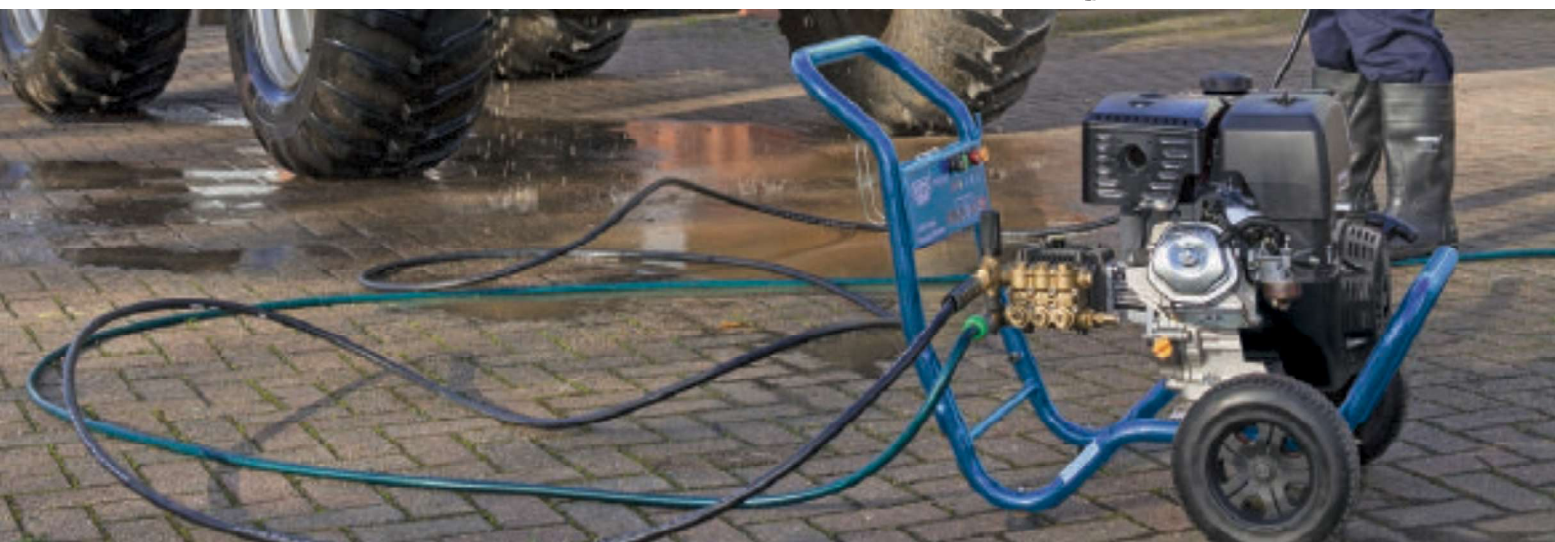



1 Submersible Clean Water Pump, 108L/min, 250W

- Fitted with thermal overload protection
- Supplied with 25-32mm diameter stepped hose adaptor
- 10M (approx.) cable

Voltage:	230V
Maximum output:	108L/min
Maximum head height:	6.5M
Motor:	250W
Float switch:	No
Output aperture diameter:	32mm
Max particle diameter:	3mm
Hose adaptor diameter:	25-32mm
Weight:	3.55kg

Stock No.	Part No.
98911	SWP121



2 Submersible Clean Water Pump with Float Switch, 108L/min, 250W

- Fitted with thermal overload protection
- Supplied with 25-32mm diameter stepped hose adaptor
- 10M (approx.) cable

Voltage:	230V
Maximum output:	108L/min
Maximum head height:	6.5M
Motor:	250W
Float switch:	Yes
Output aperture diameter:	32mm
Max particle diameter:	3mm
Hose adaptor diameter:	25-32mm
Weight:	3.8kg

Stock No.	Part No.
98912	SWP120A



3 110V Submersible Clean Water Pump, 100L/min, 250W

- Fitted with a ceramic shaft and thermal overload protection
- Supplied with 25-32mm diameter stepped hose adaptor
- 10m (approx.) cable

Voltage:	110V
Maximum output:	100L/min
Maximum head height:	6m
Motor:	250W
Float switch:	Yes
Output aperture diameter:	32mm
Max particle diameter:	5mm
Hose adaptor diameter:	25-32mm
Weight:	3.9kg

Stock No.	Part No.
98913	SWP105A110



4 Submersible Clean Water Pump with Float Switch, 191L/min, 550W

- Ideal for pumping out clean water for general irrigation and other similar applications
- Fitted with thermal overload protection and float switch that automatically turns the water pump off when water level has dropped
- 10m (approx.) cable

Voltage:	230V
Maximum output:	191L/min
Maximum head height:	9.5M
Motor:	550W
Float Switch:	Yes
Output aperture diameter:	32mm
Max particle diameter:	3mm
Hose adaptor diameter:	19mm
Weight:	4.5kg

Stock No.	Part No.
61584	SWP200



5 Submersible Dirty Water Pump with Float Switch, 166L/min, 550W

- Ideal for pumping out inspection pits, ditches and footings where suspended solids may be present, general irrigation and other similar applications
- Fitted with thermal overload protection and float switch that automatically turns the water pump off when water level has dropped
- 10m (approx) of cable

Voltage:	230V
Maximum output:	166L/min
Maximum head height:	8.5M
Motor:	550W
Float Switch:	Yes
Output aperture diameter:	32mm
Max particle diameter:	30mm
Hose adaptor diameter:	19mm
Weight:	4.6kg

Stock No.	Part No.
61621	SWP170DW



6 Submersible Dirty Water Pump with Float Switch, 280L/min, 850W

- Ideal for pumping out inspection pits, ditches and footings where suspended solids may be present, general irrigation and other similar applications
- Fitted with thermal overload protection and float switch that automatically turns the water pump off when water level has dropped
- 10m (approx) of cable

Voltage:	230V
Maximum output:	280L/min
Maximum head height:	8M
Motor:	850W
Float switch:	Yes
Output aperture diameter:	42mm
Max particle diameter:	30mm
Hose adaptor diameter:	25-42mm
Weight:	6.7kg

Stock No.	Part No.
98914	SWP280



1 110V Submersible Dirty Water Pump with Float Switch, 216L/min, 750W

- Ideal for pumping out inspection pits, ditches and footings where suspended solids may be present, general irrigation and other similar applications
- Fitted with thermal overload protection and float switch that automatically turns the water pump off when water level has dropped
- 10m (approx) of cable

Voltage:	110V
Maximum output:	216L/min
Maximum head height:	8m
Motor:	750W
Float switch:	Yes
Output aperture diameter:	35mm
Max particle diameter:	35mm
Hose adaptor diameter:	25-35mm
Weight:	5.5kg

Stock No.	Part No.
98920	SWP220



2 Submersible Dirty Water Pump with Float Switch, 200L/min, 750W

- Ideal for pumping out inspection pits, ditches and footings where suspended solids may be present, general irrigation and other similar applications
- Fitted with thermal overload protection and float switch that automatically turns the water pump off when water level has dropped
- 10m (approx) of cable

Voltage:	230V
Maximum output:	200L/min
Maximum head height:	9.5M
Motor:	750W
Float Switch:	Yes
Output aperture diameter:	32mm
Max particle diameter:	30mm
Hose adaptor diameter:	19mm
Weight:	6.2kg

Stock No.	Part No.
61667	SWP210DW



3 Submersible Dirty Water Pump with Float Switch, 416L/min, 1300W

- Maximum particle size aperture
- Fitted with a ceramic shaft and thermal overload protection
- Supplied with 50mm diameter hose adaptor
- 10M (approx.) cable and

Voltage:	230V
Maximum output:	416L/min
Maximum head height:	11M
Motor:	1300W
Float switch:	Yes
Output aperture diameter:	50mm
Max particle diameter:	38mm
Hose adaptor diameter:	50mm
Weight:	7.7kg

Stock No.	Part No.
98919	SWP420



4 Submersible Clean Water Pump with Integral Float Switch, 150L/min, 400W

- Integrated float switch
- 10M (approx.) cable
- Supplied with 25-32mm diameter stepped hose adaptor

Voltage:	230V
Maximum output:	150L/min
Maximum head height:	8M
Motor:	400W
Float switch:	Yes
Output aperture diameter:	25-32mm
Max particle diameter:	5mm
Hose adaptor diameter:	25-32mm
Weight:	4.36kg

Stock No.	Part No.
98917	SWP150IFS



5 Submersible Clean Water Pump with Integral Float Switch, 216L/min, 750W

- Integrated float switch
- 10M (approx.) cable
- Supplied with 25-32mm diameter stepped hose adaptor

Voltage:	230V
Maximum output:	216L/min
Maximum head height:	8.5M
Motor:	750W
Float switch:	Yes
Output aperture diameter:	25-32mm
Max particle diameter:	5mm
Hose adaptor diameter:	25-32mm
Weight:	4.3kg

Stock No.	Part No.
98918	SWP220IFS



6 Deep Clean Water Submersible Well Pump with Float Switch, 91L/min, 1000W

- Maximum particle size aperture
- 15M (approx.) cable
- Float switch automatically turns the pump off

Voltage:	230V
Maximum output:	91L/min
Maximum head height:	40M
Motor:	1000W
Float switch:	Yes
Output aperture diameter:	25mm
Max particle diameter:	1mm
Hose adaptor diameter:	25mm
Weight:	3.6kg

Stock No.	Part No.
98921	DSWP1000A



1 Submersible Clean Water Butt Pump with Float Switch, 40L/min, 350W

- Perfect for emptying water butts when watering garden plants
- Supplied with three piece aluminium swan neck extension pipe and snap on connector
- Float switch automatically turns pump off when water level has dropped
- Maximum head height 11M
- Supplied with 10m (approx.) cable and approved plug

Voltage:	230V
Maximum output:	40L/min
Maximum head height:	11M
Motor:	350W
Float Switch:	Yes
Output aperture diameter:	N/A
Max particle diameter:	3mm
Hose adaptor diameter:	19mm
Weight:	5kg

Stock No.	Part No.
36327	WBP2A



2 Surface Mounted Pump, 53L/min, 800W

- Thermal overload protection
- Weatherproof on/off switch
- Corrosion resistant casing
- 25mm outlet

Voltage:	230V
Maximum output:	53L/min
Maximum head height:	38M
Motor:	800W
Float switch:	N/A
Output aperture diameter:	25mm
Max particle diameter:	1mm
Hose adaptor diameter:	25mm
Weight:	8kg

Stock No.	Part No.
98923	SP53



3 Surface Mounted Water Pump, 76L/min, 1100W

- Thermal overload protection

Voltage:	230V
Maximum output:	76L/min
Maximum head height:	45M
Motor:	1100W
Float switch:	N/A
Output aperture diameter:	25mm
Max particle diameter:	1mm
Hose adaptor diameter:	25mm
Weight:	8.6kg

Stock No.	Part No.
10461	SP77



4 Multi Stage Surface Mounted Water Pump, 90L/min, 1100W

- Multi stage pressurising
- Thermal overload protection
- Weatherproof on/off switch
- 25mm outlet

Voltage:	230V
Maximum output:	90L/min
Maximum head height:	46M
Motor:	1100W
Float switch:	N/A
Output aperture diameter:	25mm
Max particle diameter:	1mm
Hose adaptor diameter:	25mm
Weight:	10.5kg

Stock No.	Part No.
98922	SP90MS



5 Stainless Steel Booster Pump, 50L/min, 800W

- Automatic cut-off pressure switch
- 20L stainless steel water tank
- Non-return valve

Voltage:	230V
Maximum output:	50L/min
Maximum head height:	38M
Motor:	800W
Float switch:	N/A
Output aperture diameter:	25mm
Max particle diameter:	N/A
Hose adaptor diameter:	25mm
Weight:	10.4kg

Stock No.	Part No.
98915	BP3



1

Petrol Water Pump, 85L/min, 2.5HP

- Expert Quality
- For pumping water in locations where mains power is not available
- Self priming
- Ideal for pumping out footings, flooded premises and large ponds
- Powered by a 2.5HP four stroke petrol engine
- Easy pull start
- Hose outlet size: 25mm
- Supplied with two metal hose couplings, suction filter and box spanner

Do not operate water pump in enclosed spaces

Maximum head height:	10M
Max. head height (suction):	6M
Maximum output:	85L/min
Suction aperture:	25mm
Output aperture:	25mm
Engine:	2.5HP - 4 stroke
Displacement:	98cc
Start:	recoil
Fuel tank capacity:	1.4L
Weight:	11kg
Stock No.	Part No.
87680	PWP27

2

Petrol Water Pump, 500L/Min, 4.8HP

- Expert Quality
- For pumping water in locations where mains power is not available
- Self priming
- Ideal for pumping out footings, flooded premises and large ponds
- Powered by a 4.8HP four stroke petrol engine
- Heavy duty tubular steel frame with coated finish
- Easy pull start
- Hose outlet size: 50mm
- Supplied with two metal hose couplings, suction filter and box spanner

Do not operate water pump in enclosed spaces

Maximum head height:	25M
Max. head height (suction):	8M
Maximum output:	500L/min
Suction aperture:	50mm
Output aperture:	50mm
Engine:	4.8HP - 4 stroke OHV
Displacement:	196cc
Start:	recoil
Fuel tank capacity:	3.6L
Weight:	24kg
Stock No.	Part No.
64065	PWP52

3

Petrol Trash Water Pump, 750L/min, 7HP

- Expert Quality
- For pumping water in locations where mains power is not available
- Self priming
- Ideal for pumping out footings, flooded premises and large ponds
- Extra wide diameter outlet aperture allows the pumping of solids and waste up to 27mm diameter
- Powered by a 7HP four stroke petrol engine
- Heavy duty tubular steel frame with coated finish
- Easy pull start
- Hose outlet size: 75mm
- Supplied with two metal hose couplings, suction filter and box spanner

Do not operate water pump in enclosed spaces

Maximum head height:	26M
Max. head height (suction):	7M
Maximum output:	750L/min
Suction aperture:	75mm
Output aperture:	75mm
Engine:	7HP - 4 stroke
Displacement:	196cc
Start:	recoil
Fuel tank capacity:	3.6L
Weight:	35kg
Stock No.	Part No.
16128	PWP82T





1 10m Solid Wall PVC Suction Hoses

Clear hose walls for ease of checking fluid transfer. Strong spiral reinforcement, flexible for ease of positioning. For use with Draper petrol-powered water pumps and other manufacturers similar products. Supplied polythene wrapped.

Stock No.	Part No.	Size
20469	APWP1	25mm/1"
20470	APWP2	50mm/2"
20471	APWP3	75mm/3"



2 Heavy Duty Layflat Hoses

Heavy-duty hoses manufactured with a reinforced black liner enabling the hose to withstand a higher bursting pressure. Packed in polybag.

Stock No.	Part No.	Size	Colour
28703	ASWP2	5m x 25mm	Blue
36990	ASWP3A	5m x 25mm	Yellow
53204	ASWP4A	5m x 32mm	Yellow
45343	ASWP3A	10m x 25mm	Yellow
36947	ASWP4	10m x 32mm	Yellow
73171	ASWP5	10m x 38mm	Yellow



3 Layflat Hoses

For use with submersible water pumps. Packed in polybag.

Stock No.	Part No.	Size
80719	ASWP6A	10m x 50mm
80720	ASWP7A	10m x 75mm



4 Hose Coupling Adaptors

ABS construction with unique cam locking mechanism with internal rubber seal. For use with flexible suction hoses used with Draper petrol-powered water pumps. Carton packed.

Stock No.	Part No.	Diameter
23200	ASH1	25mm (1")
23201	ASH2	50mm (2")
23202	ASH3	75mm (3")



5 Hose Clamps (Pack of 2)

Double wire ensures greater security than a standard hose clamp. Screw and brace mechanism tightens the clamp into place. Sold in pairs. Display packed.

Stock No.	Part No.	Capacity
22598	ASHC1	25 - 29mm
22599	ASHC2	53 - 59mm
22601	ASHC3	76 - 82mm



6 Foot Valve Strainers

For use with flexible suction hoses used with Draper petrol-powered water pumps. Reduces oversized solids from entering pump and acts as a non-return valve.

Stock No.	Part No.	Hose Internal Diameter
19547	FVS1	25mm/1"
19548	FVS2	50mm/2"
19552	FVS3	75mm/3"



1 Petrol Inverter Generator, 700W

- Inverter technology
- Powered by 4-stroke engine
- Low noise
- 1 x 230V socket
- 12V DC output

Rated output:	700W
Maximum output:	800W
Voltage:	230V
Noise:	58dB(A) at 7m
Continuous run time:	4.1 hours - 100%
Engine capacity:	40cc Petrol
Fuel tank:	2.1L
Dimensions:	(L) 425 x (W) 230 x (H) 380mm
Weight (net):	10.2kg
Sound pressure level:	93dB(A)

Stock No.	Part No.
95176	DGI800DI



2 Petrol Inverter Generator, 1000W

- Inverter technology
- Powered by 4-stroke engine
- Low noise
- 1 x 230V socket
- 12V DC output

Rated output:	1000W
Maximum output:	1100W
Voltage:	230V
Noise:	58dB(A) at 7m
Continuous run time:	4.8 hours - 100%
Engine capacity:	60cc Petrol
Fuel tank:	3.0L
Dimensions:	(L) 480 x (W) 255 x (H) 425mm
Weight (net):	12.1kg
Sound pressure level:	93dB(A)

Stock No.	Part No.
95196	DGI1200DI



3 Petrol Inverter Generator, 1700W

- Inverter technology
- Powered by 4-stroke engine
- Low noise
- 2 x 230V sockets
- 12V DC output
- Perfect for building sites and outdoor leisure activities

Rated output:	1700W
Maximum output:	1800W
Voltage:	230V
Noise:	60dB(A) at 7m
Continuous run time:	3.9 hours - 100%
Engine capacity:	99cc Petrol
Fuel tank:	4.1L
Dimensions:	(L) 555 x (W) 315 x (H) 490mm
Weight (net):	18.5kg
Sound pressure level:	93dB(A)

Stock No.	Part No.
80956	DGI2000



4 Petrol Inverter Generator, 2300W

- Inverter technology
- Powered by 4-stroke engine
- Low noise
- 2 x 230V sockets
- 12V DC output

Rated output:	2300W
Maximum output:	2500W
Voltage:	230V
Noise:	62dB(A) at 7m
Continuous run time:	5 hours - 100%
Engine capacity:	125cc Petrol
Fuel tank:	7.5L
Dimensions:	(L) 695 x (W) 395 x (H) 560mm
Weight (net):	33kg
Sound pressure level:	94dB(A)

Stock No.	Part No.
95197	DGI2600DI



1 Petrol Inverter Generator, 2800W

- Inverter technology
- Powered by 4-stroke engine
- Low noise
- 2 x 230V sockets
- 12V DC output

Rated power:	2800W
Maximum output:	3100W
Voltage:	230V
Noise:	62dB(A) at 7m
Continuous run time:	3.4 hours - 100%
Engine capacity:	149.5cc Petrol
Fuel tank:	7.5L
Dimensions:	(L) 695 x (W) 395 x (H) 560mm
Weight (net):	33.5kg
Sound pressure level:	96dB(A)
Stock No.	Part No.
95198	DGI3500DI



2 Open Frame Inverter Generator, 2800W

- Inverter technology
- Powered by 4-stroke engine
- Light and compact compared to traditional generators
- 2 x 230V sockets
- 5V DC output (2 x USB)
- 1 x Spark plug wrench

Rated output:	2800W
Maximum output:	3200W
Voltage:	2 x 230V
Noise:	96dB(A) at 7m
Continuous run time:	5 hours - 100%
Engine capacity:	196cc Petrol
Fuel tank:	5.0L
Dimensions:	(L) 500 x (W) 350 x (H) 495mm
Weight (net):	26kg
Stock No.	Part No.
95204	PG3000DI



3 Petrol Generator, 2000W

- Powered by 4-stroke petrol engine
- Recoil start
- Steel tubular frame with polyester coated finish
- Dual voltage output 110/230V
- 12V DC output

Rated output:	2000W
Maximum output:	2400W
Noise:	95dB(A) at 4m
Continuous run time:	4.2 hours at 75% load
Sockets:	1 x 110V 16A, 1 x 230V 16A, 1 x 12V DC
Engine:	210cc Petrol
Fuel tank:	3.6L
Dimensions:	(L) 610 x (W) 435 x (H) 460mm
Weight (net):	36kg
Stock No.	Part No.
87059	PG252F



4 Petrol Generator with Wheels, 2000W

- Powered by 4-stroke petrol engine
- Recoil start
- Steel tubular frame with polyester coated finish
- Dual voltage output 110/230V
- 12V DC output

Rated output:	2000W
Maximum output:	2400W
Noise:	95dB(A) at 4m
Continuous run time:	9 hours at 75% load
Sockets:	1 x 230V 16A, 1 x 110V 16A, 1 x 12V DC
Engine:	210cc Petrol
Fuel tank:	15L
Dimensions:	(L) 620 x (W) 450 x (H) 460mm
Weight (net):	39kg
Stock No.	Part No.
16066	PG253W



1 Petrol Generator with Wheels, 2500W

- Powered by 4-stroke petrol engine
- Recoil start
- Steel tubular frame with polyester coated finish
- Dual voltage output 110/230V
- 12V DC output

Rated output:	2500W
Maximum output:	2700W
Noise:	95dB(A) at 4m
Continuous run time:	11 hours at 75% load
Sockets:	1 x 230V 16A, 1 x 110V 16A, 1 x 12V DC
Engine:	210cc petrol
Fuel tank:	15L
Dimensions:	(L) 620 x (W) 450 x (H) 460mm
Weight (net):	40kg
Stock No.	Part No.
87088	PG28W



2 Petrol Generator with Wheels, 4000W

- Powered by 4-stroke petrol engine
- Recoil and electric start
- Steel tubular frame with polyester coated finish
- Dual voltage output 110/230V
- 12V DC output

Rated output:	3500W
Maximum output:	4400W
Noise:	97dB(A) at 4m
Continuous run time:	9 hours at 75% load
Sockets:	1 x 110V 16A, 1 x 230V 16A, 1 x 110V 32A, 1 x 12V DC
Engine:	389cc Petrol
Fuel tank:	25L
Dimensions:	(L) 710 x (W) 560 x (H) 570mm
Weight (net):	89kg
Stock No.	Part No.
23984	PG43W



3 Petrol Generator with Wheels, 5000W

- Powered by 4-stroke petrol engine
- Recoil and electric start
- Steel tubular frame with polyester coated finish
- Dual voltage output 110/230V
- 12V DC output

Rated output:	5000W
Maximum output:	5500W
Noise:	97dB(A) at 4m
Continuous run time:	9 hours at 75% load
Sockets:	2 x 110V 16A, 2 x 230V 16A, 1 x 110V 32A, 1 x 12V DC
Engine:	389cc Petrol
Fuel tank:	25L
Dimensions:	(L) 710 x (W) 560 x (H) 570mm
Weight (net):	91kg
Stock No.	Part No.
23987	PG58W



4 Petrol Generator with Wheels, 6500W

- Powered by 4-stroke petrol engine
- Recoil and electric start
- Steel tubular frame with polyester coated finish
- Dual voltage output 110/230V
- 12V DC output

Rated output:	6000W
Maximum output:	6500W
Noise:	97dB(A) at 4m
Continuous run time:	8 hours at 75% load
Sockets:	2 x 110V 16A, 1 x 230V 32A, 1 x 12V DC
Engine:	420cc Petrol
Fuel tank:	25L
Dimensions:	(L) 720 x (W) 550 x (H) 590mm
Weight (net):	84kg
Stock No.	Part No.
16143	PG68W